

EST.



1998

WE SECURE YOUR LIFE  
\*\*\*\*\*

## MTM14E

### MULTI TENANT MODULE

For connecting up to 14 third-party call buttons

**GENERAL**

Dimensions	40,6 x 15 x 131,7 mm (H x W x D) 2 x 0,6 x 5,2 in (H x W x D)
Connectors	<p>14x Screw connection terminal jacks and plugs with four pins:</p> <ul style="list-style-type: none"> <li>• E, E: Digital input (0 V, 0 A (NO)), for button switch</li> <li>• V-: Negative pole for call button LED illumination</li> <li>• V+: Positive pole for call button LED illumination, 5 or 9 or 12 V DC, max. 5 mA</li> <li>• Door Station: For connecting with the communication port of the door station. D21x series: Connect with red cable of the door station</li> </ul>
Scope of delivery	1x Multi Tenant Module MTM14E
Approvals	IP40
Weather-proof	No
Weight	65 g
EAN	4260423866836

**CURRENT SYSTEM REQUIREMENTS**

Supported door stations · D21x series without keypad

**OPTIONAL ACCESSORIES**


Sold separately see [www.doorbird.com/buy](http://www.doorbird.com/buy)

The Multi Tenant Module for D21x IP Video Door Stations allows you to connect up to 14 third-party call buttons from almost any call button manufacturer.

Call buttons connected to the digital inputs of the MTM14E for button switches ("E, E") must be potential-free.

In case the call button does have illumination, only LED illumination is supported since light bulbs with filament consume too much power to the module.

If you want to connect a door chime, please use the DoorBird IP Door Chime A1061W or DoorBird IP Video Indoor Station A1101. Connecting an analog door chime to the digital inputs for the button switches ("E, E") is not supported.

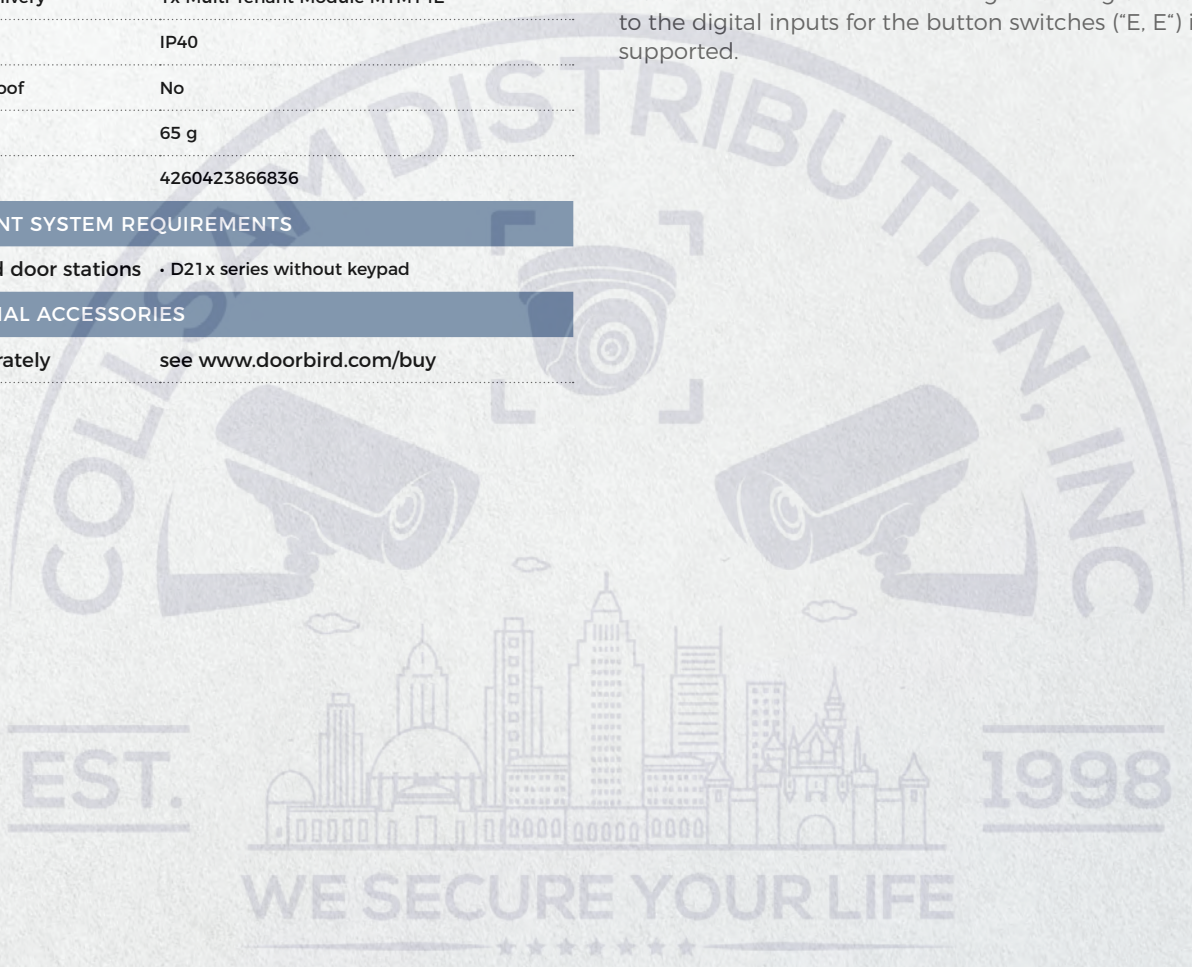

**Distributed By**  
 Collsam Distributions; Inc.  
 Sales: (951) 282-8707 [sales@Collsam.com](mailto:sales@Collsam.com)  
 Support: (213) 210-5744 [support@Collsam.com](mailto:support@Collsam.com)  
 Website: [www.Collsam.com](http://www.Collsam.com)

