

## Junction box for bullet cameras

DWC-MBTJUNCW




### WHAT'S IN THE BOX


Ceiling Mount Bracket Mounting Screws and Anchors (PA4x25mm, head diameter 8mm)		x4
Waterproof Rings for Mounting Screws		x4
Mounting Template		x1
Camera Mounting screws (PM4x10mm, head diameter 6.6mm)		x4
Cable Gland Connector		x1

## INSTALLATION



- 1 Separate the mounting plate from the junction box base by loosening the four (4) screws.
- 2 Using the mounting template or the junction box base itself, mark and drill the necessary holes on the mounting surface.



- 3 Secure the junction box base to the mounting surface using the screws and anchors that were included with the junction box.
- 4 Connect the camera to the mounting plate using the included camera mounting screws.



- 5 Make all necessary cable connections to the camera and arrange the cables in the junction box base. Use the waterproof cap and gasket with the network cable to reduce the risk of water leaks. See the camera's QSG for more information.
- 6 Connect the mounting plate to the junction box's base using the included screws (from INSTALLATION Step 1).

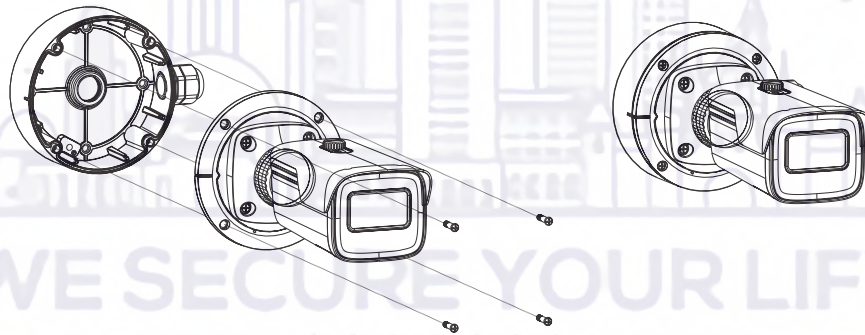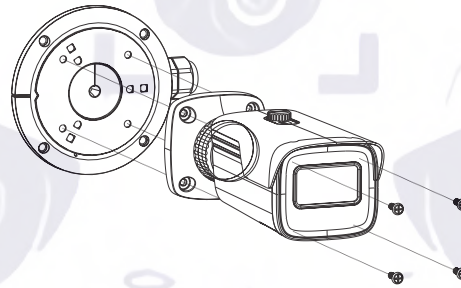

- 7 Adjust the camera's lens position and angle using the camera's tilting arm. Lock the arm into place by securing the tilting screws at the base of the arm.