



VAX-TROVE 10-16 door model



VAX-TROVE 2-8 door model

Product at a Glance

- ▶ Used when centralized control of multiple doors is required
- ▶ 2-, 4-, 6-, 8-, 10-, 12-, 14-, and 16-door units
- ▶ Mounted in an Altronix Trove enclosure with built-in eFlow power supply
- ▶ Includes MDK Master Controller and two-door expansion boards
- ▶ 3 to 48 configurable inputs (model dependent)
- ▶ Port for battery backup (battery not included)
- ▶ Unlimited door time zones
- ▶ Supports user holiday groups
- ▶ Can be mounted in equipment rooms for control elsewhere in the system

Overview

The Vicon Access Control (VAX®) system consists of a dedicated Vicon Access Control Server and the edge Controller(s). The Server contains the operating system, database engine, web server, application software and configuration data. The Controller communicates back to the Server over the network and provides an interface to readers, relay outputs, door locks, etc. Vicon offers unique multi-door controllers housed in Altronix® Trove™ lockable enclosures. The VAX-TROVE is a traditional style door controller, designed to be easily scalable and provide seamless retrofits. They are available in two (2) to sixteen (16) door models. Refer to Ordering Information for specific model names.

The two - eight (2 - 8) door models include one (1) Master Controller (VAX-MDK Master) and an appropriate number of two-door expander boards (VAX-EXP-2D) in a Trove1 enclosure powered by an eFlow6NB power supply. The ten - sixteen (10 - 16) door models consists of two (2) Master Controllers (VAX-MDK Master) and an appropriate number of two-door expander boards (VAX-EXP-2D) in a Trove2 enclosure powered by an eFlow102NB power supply. Refer to the Specifications section for details.

The Master Controller provides on-board communications and connects via a single TCP/IP to a local or external VAX server for configuration data and event management. The two-door expansion boards connect via RS-485 in the same enclosure or remotely. The Trove enclosure includes a built-in eFlow power supply that provides 12 VDC and a port for back-up battery. The controller provides LED indicators for system status and an LCD display and tactile buttons for simple IP configuration and system diagnostics. Configurable inputs and relay outputs are supported.

Specifications

Controller Hardware	VAX-TROVE-2DR	VAX-TROVE-4DR	VAX-TROVE-6DR	VAX-TROVE-8DR
Hardware Components:	1X VAX-MDK Master; 1x VAX-EXP-2D; 1X Trove 1 enclosure; 1x eFlow6NB power supply	1X VAX-MDK Master; 2x VAX-EXP-2D; 1X Trove 1 enclosure; 1x eFlow6NB power supply	1X VAX-MDK Master; 3x VAX-EXP-2D; 1X Trove 1 enclosure; 1x eFlow6NB power supply	1x VAX-MDK Master; 4X VAX-EXP-2D; 1X Trove 1 enclosure; 1x eFlow6NB power supply
Processor:	32-bit microprocessor based			
Power:	Supply: eFlow6NB. Input: 120 VAC, 60 Hz, 3.5 A; Output: 12 VDC @ 6 A. Supervised fire alarm disconnect (NO/NC trigger), short circuit and overload protection and AC Fail supervision. Port for battery backup with built-in charging for standard 12 VDC 7 Ah dry cell battery (not included).			
Communication:	Between Master controller and VAX web server: 1x Ethernet 10/100 Mbps. Between Master controller and VAX-EXP-2D: RS-485 2-wire (daisy chain or star) Wire Spec: 2000 ft (600 m) max distance; 2 conductors, stranded 22 AWG, shielded			
Network:	Speed: 10/100 Mbps. Modes: Static or DHCP. MAC: Unique. Encryption (panel-server): 256 bit AES option. 1 NIC port Wire Spec: 328 ft (100 m) max distance, Cat5 or better			
I/O:	Inputs: 6X supervised or digital (door contact, exit button, external REX, etc). Outputs: 2X lock relays (12 VDC, 500 mA power per lock; 4X solid state relays (24 VDC, 1 A limit per relay). Wire Spec: 500 ft (152 m) max distance; 2 conductors, stranded 22 AWG, shielded.	Inputs: 12X supervised or digital (door contact, exit button, external REX, etc). Outputs: 4X lock relays (12 VDC, 500 mA power per lock; 8X solid state relays (24 VDC, 1 A limit per relay). Wire Spec: 500 ft (152 m) max distance; 2 conductors, stranded 22 AWG, shielded.	Inputs: 18X supervised or digital (door contact, exit button, external REX, etc). Outputs: 6X lock relays (12 VDC, 500 mA power per lock; 12X solid state relays (24 VDC, 1 A limit per relay). Wire Spec: 500 ft (152 m) max distance; 2 conductors, stranded 22 AWG, shielded.	Inputs: 24X supervised or digital (door contact, exit button, external REX, etc). Outputs: 8X lock relays (12 VDC, 500 mA power per lock); 16X solid state relays (24 VDC, 1 A limit per relay). Wire Spec: 500 ft (152 m) max distance; 2 conductors, stranded 22 AWG, shielded.
Readers:	Reader Port: 2X Wiegand	Reader Port: 4X Wiegand	Reader Port: 6X Wiegand	Reader Port: 8X Wiegand
User Interface:	LED indicators: 5x power; 2x reader; 1x network; 5X heartbeat; 6X relay output; 5X on/off line; 6X RS-485 status. LCD Display: 1X 16-channel; 2-line LCD with backlight. Push Buttons: 4 tactile switch. Sound: 1X 90 dB Piezo buzzer.	LED indicators: 7x power; 4x reader; 1X network; 5X heartbeat; 12X relay output; 5X on/off line; 8X RS-485 status. LCD Display: 1X 16-channel; 2-line LCD with backlight. Push Buttons: 4 tactile switch. Sound: 1X 90 dB Piezo buzzer.	LED indicators: 9X power; 6x reader; 1x network; 5X heartbeat; 18X relay output; 5X on/off line; 10X RS-485 status. LCD Display: 1X 16-channel; 2-line LCD with backlight. Push Buttons: 4 tactile switch. Sound: 1X 90 dB Piezo buzzer.	LED indicators: 11X power; 8x reader; 1x network; 5X heartbeat; 24X relay output; 5x on/off line; 12X RS-485 status. LCD Display: 1X 16-channel; 2-line LCD with backlight. Push Buttons: 4 tactile switch. Sound: 1X 90 dB Piezo buzzer.
Schedules:	Unlimited door time zones (20 zones per time zone); 256 user time zones; 32 one-time special event door time zones (single zone); 50 door/user holiday groups; supports input time zones; supports output time zones			
Protection:	Over-current			
Time Keeping:	Date/Time: 1x on-board real-time clock (no battery required, maintains up to 1 month); automatic DST switch			
Memory:	Flash Memory: 8.0 Mb			
Housing and Backplane:	Steel (16 AWG) powder-coated lockable enclosure; THC1 backplane includes standoffs for eFlow6NB power supply and MDK controllers. 9x 1/2"-3/4" combination knockouts; 1x 1.5" knockout			
Options:	24 VDC Converter: converts 12 VDC to 24 VDC Dry Contact Converter: converts wet to dry contact Expansion Port: supports serial, extra memory, I/Os for future expansion			
Storage:	Stores up to 100,000 cardholders. Stores up to 50,000 events, first in first out queue.			

Mechanical & Environmental

Dimensions:	W: 14.5 in. (368 mm); H: 18.0 in. (457 mm); D: 4.62 in. (117 mm)
Weight:	11.8 lb (5.35 kg)
Operating Temperature:	32 - 120° F (0 - 49° C)
Operating Humidity:	10% to 85% relative humidity, non-condensing
Approvals:	UL294; CE
Country of Origin:	Canada

End of Life

End of Life

Controller Hardware	VAX-TROVE-10DR	VAX-TROVE-12DR	VAX-TROVE-14DR	VAX-TROVE-16DR
Hardware Components:	2X VAX-MDK Master; 5X VAX-EXP-2D; 1X Trove 2 enclosure; 1X eFlow102NB power supply	2x VAX-MDK Master; 6X VAX-EXP-2D; 1XTrove 2 enclosure; 1X eFlow102NB power supply	2X VAX-MDK Master; 7X VAX-EXP-2D; 1X Trove 2 enclosure; 1X eFlow102NB power supply	2X VAX-MDK Master; 8x VAX-EXP-2D; 1X Trove 2 enclosure; 1X eFlow102NB power supply
Processor:	32-bit microprocessor based			
Power:	Supply: eFlow102NB. Input: 120 VAC, 60 Hz, 3.5 A; Output: 12 VDC @ 10 A. Supervised fire alarm disconnect (NO/NC trigger), short circuit and overload protection and AC Fail supervision. Port for battery backup with built-in charging for standard 12 VDC 7 Ah dry cell battery (not included).			
Communication:	Between Master controller and VAX web server: 1x Ethernet 10/100 Mbps. Between Master controller and VAX-EXP-2D: RS-485 2-wire (daisy chain or star) Wire Spec: 2000 ft (600 m) max distance; 2 conductors, stranded 22 AWG, shielded			
Network:	Speed: 10/100 Mbps. Modes: Static or DHCP. MAC: Unique. Encryption (panel-server): 256 bit AES option. 2 NIC ports Wire Spec: 328 ft (100 m) max distance, Cat5 or better			
I/O:	Inputs: 30X supervised or digital (door contact, exit button, external REX, etc). Outputs: 10X lock relays (12 VDC, 500 mA power per lock; 20X solid state relays (24 VDC, 1 A limit per relay). Wire Spec: 500 ft (152 m) max distance; 2 conductors, stranded 22 AWG, shielded.	Inputs: 36X supervised or digital (door contact, exit button, external REX, etc). Outputs: 12X lock relays (12 VDC, 500 mA power per lock; 24X solid state relays (24 VDC, 1 A limit per relay). Wire Spec: 500 ft (152 m) max distance; 2 conductors, stranded 22 AWG, shielded.	Inputs: 42X supervised or digital (door contact, exit button, external REX, etc). Outputs: 14X lock relays (12 VDC, 500 mA power per lock; 28X solid state relays (24 VDC, 1 A limit per relay). Wire Spec: 500 ft (152 m) max distance; 2 conductors, stranded 22 AWG, shielded.	Inputs: 48X supervised or digital (door contact, exit button, external REX, etc). Outputs: 16X lock relays (12 VDC, 500 mA power per lock; 32X solid state relays (24 VDC, 1 A limit per relay). Wire Spec: 500 ft (152 m) max distance; 2 conductors, stranded 22 AWG, shielded.
Readers:	Reader Port: 10x Wiegand	Reader Port: 12x Wiegand	Reader Port: 14x Wiegand	Reader Port: 16x Wiegand
User Interface:	LED indicators: 13X power; 10x reader; 2x network; 10X heartbeat; 48X relay output; 10X on/off line; 14X RS-485 status LCD Display: 1X 16-channel; 2-line LCD with backlight Push Buttons: 4 tactile switch Sound: 1X 90 dB Piezo buzzer	LED indicators: 15X power; 12x reader; 2X network; 10x heartbeat; 48X relay output; 10x on/off line; 16X RS-485 status LCD Display: 1X 16-channel; 2-line LCD with backlight Push Buttons: 4 tactile switch Sound: 1X 90 dB Piezo buzzer	LED indicators: 17X power; 14X reader; 2X network; 10X heartbeat; 48X relay output; 10x on/off line; 18X RS-485 status LCD Display: 1X 16-channel; 2-line LCD with backlight Push Buttons: 4 tactile switch Sound: 1X 90 dB Piezo buzzer	LED indicators: 19X power; 16X reader; 2X network; 10x heartbeat; 48X relay output; 10x on/off line; 20X RS-485 status LCD Display: 1X 16-channel; 2-line LCD with backlight Push Buttons: 4 tactile switch Sound: 1X 90 dB Piezo buzzer
Schedules:	Unlimited door time zones (20 zones per time zone); 256 user time zones; 32 one-time special event door time zones (single zone); 50 door/user holiday groups; supports input time zones; supports output time zones			
Protection:	Over-current			
Time Keeping:	Date/Time: 1x on-board real-time clock (no battery required, maintains up to 1 month); automatic DST switch			
Memory:	Flash Memory: 8.0 Mb			
Housing and Backplane:	Steel (16 AWG) powder-coated lockable enclosure; THC2 backplane includes standoff for eFlow102NB power supply and MDK controllers. 16x 3/4"-1" combination knockouts; 1x 2" knockout			
Options:	24 VDC Converter: converts 12 VDC to 24 VDC Dry Contact Converter: converts wet to dry contact Expansion Port: supports serial, extra memory, I/Os for future expansion			
Storage:	Stores up to 100,000 cardholders. Stores up to 50,000 events, first in first out queue.			

Mechanical & Environmental

Dimensions:	W: 21.75 in. (546 mm); H: 27.25 in. (692 mm); D: 6.5 in. (165 mm)
Weight:	29.1 lb (13.2 kg)
Operating Temperature:	32 - 120° F (0 - 49° C)
Operating Humidity:	10% to 85% relative humidity, non-condensing
Approvals:	UL294; CE
Country of Origin:	Canada

Ordering Information		
Description		Model Number
Two-door controller; includes 1 master controller board, 1 two-door expander boards and a 12 VDC @ 6A power supply in an Altronix Trove1 steel lockable enclosure		VAX-TROVE-2DR
Four-door controller; includes 1 master controller board, 2 two-door expander boards and a 12 VDC @ 6A power supply in an Altronix Trove1 steel lockable enclosure		VAX-TROVE-4DR
Six-door controller; includes 1 master controller board, 3 two-door expander boards and a 12 VDC @ 6A power supply in an Altronix Trove1 steel lockable enclosure		VAX-TROVE-6DR
Eight-door controller; includes 1 master controller board, 4 two-door expander boards and a 12 VDC @ 6A power supply in an Altronix Trove1 steel lockable enclosure		VAX-TROVE-8DR
Ten-door controller; includes 2 master controller board, 5 two-door expander boards and a 12 VDC @ 10A power supply in an Altronix Trove2 steel lockable enclosure		VAX-TROVE-10DR End of Life
Twelve-door controller; includes 2 master controller board, 6 two-door expander boards and a 12 VDC @ 10A power supply in an Altronix Trove2 steel lockable enclosure		VAX-TROVE-12DR
Fourteen-door controller; includes 2 master controller board, 7 two-door expander boards and a 12 VDC @ 10A power supply in an Altronix Trove2 steel lockable enclosure		VAX-TROVE-14DR End of Life
Sixteen-door controller; includes 2 master controller board, 8 two-door expander boards and a 12 VDC @ 10A power supply in an Altronix Trove2 steel lockable enclosure		VAX-TROVE-16DR
Accessories		
Module to convert lock 12 VDC output to dry contact output		VAX-MOD-DRY
Module to convert lock 12 VDC output to 24 VDC 250 mA		VAX-MOD-24
Expansion memory module		VAX-MOD-MEM

VAX-TROVE 2-8 Door Models

Altronix eFlow6NB power supply



VAX-MDK Master controller

VAX-EXP-2D Two-Door Expansion Boards

VAX-TROVE 10-16 Door Models

Altronix eFlow102NB Power Supply




VAX-MDK Master Controller

VAX-EXP-2D Two-Door Expansion Boards

Typical Installation of a customer-supplied battery backup (VAX-TROVE-16DR enclosure).



Dimension Drawing [in. (mm)]

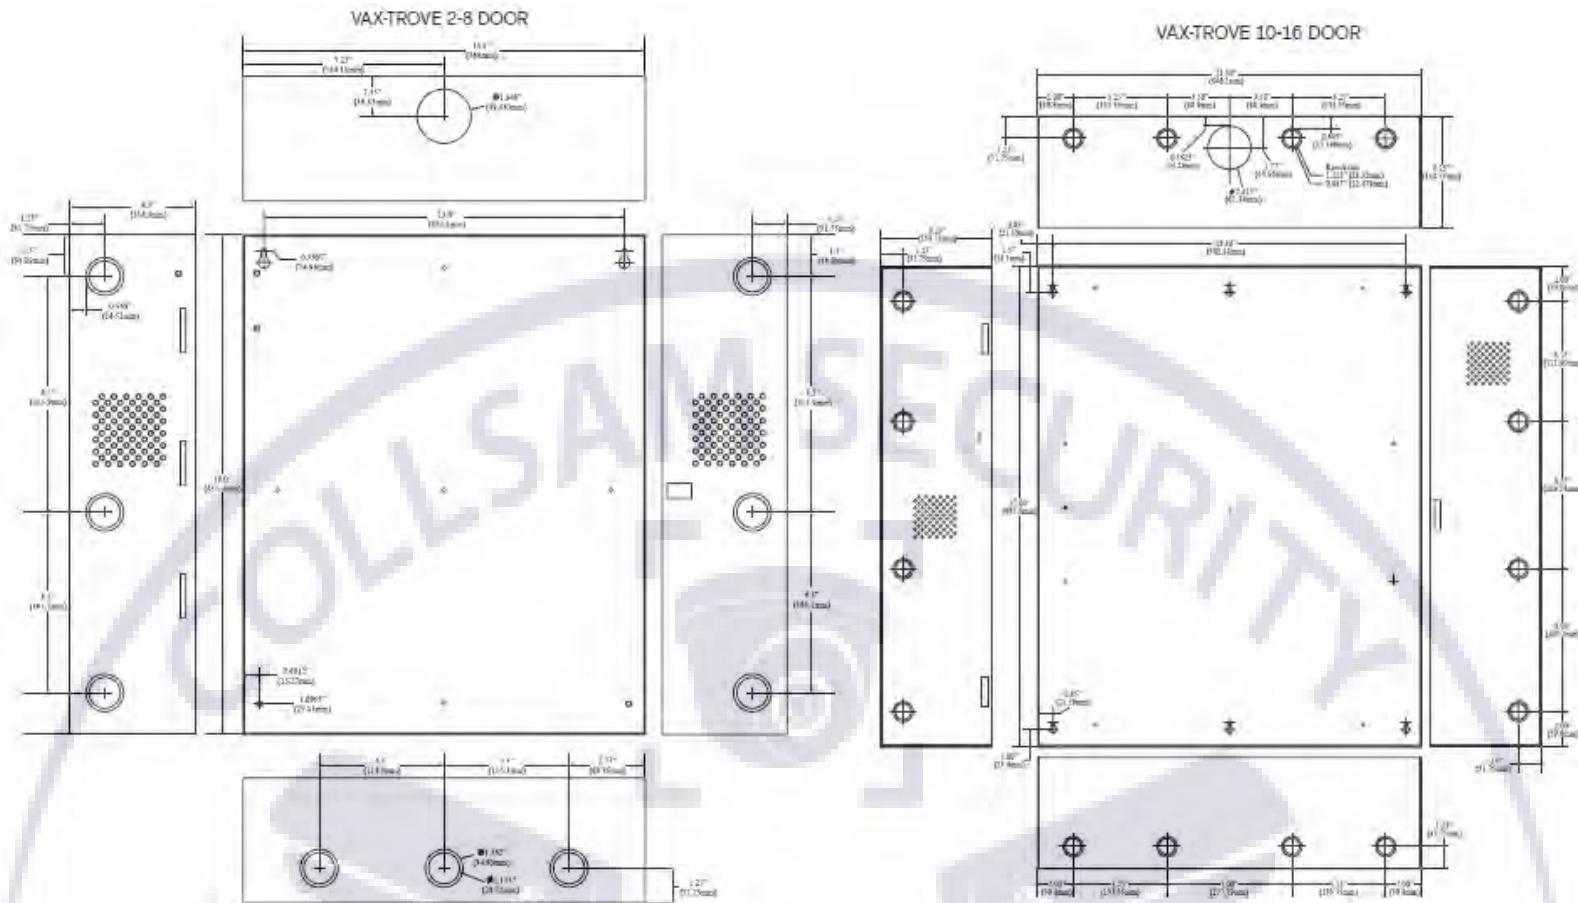

EST.

1998



Data Sheet Number: V274-91-00
 Vicon Data Sheet Number: 8009-7274-91-00

Specifications subject to change without notice.
 Vicon, VAX and their logos are registered trademarks of Vicon Industries Inc.
 Altrnix is a registered trademark and Trove is a trademark of Altrnix Corp.
 Copyright © 2021 Vicon Industries Inc. All rights reserved.

Sales@collsam.com
 (951)282-8707

[HTTPS://COLLSAM.COM](https://collsam.com)
 Images May Not Reflect the Actual Product.
 Design and specifications are subject to change without notice.

vicon-security.com

Support@collsam.com
 (213)210-6744