

# XDM-202V HD-SDI(1080P, 720P) or 1000 TV Line Over Superdome® Camera with 1/3" SONY CMOS Sensor Fixed Lens Progressive Scanning System

## FEATURES

1/3 Inch SONY CMOS  
 HD-SDI ( 1080P, 720P) / High Resolution(1000 TV Line OVER)  
 HD-SDI (High Definition Serial Digital Interface) / 1 Lux at F1.2 / 0.1  
 Lux (B/W) OSD Controlled / WDR (Wide Dynamic Range) / Day &  
 Night Function  
 DNR (Digital Noise Reduction) / Motion / Privacy / Easy Installation  
 Fixed Lens 3,7mm



## DIMENSION




## SPECIFICATION


Resolution	HD-SDI(1080P, 720P) / 1000 TV LINE OVER
Sensor	1/3 inch SONY CMOS
Total Pixels	2010(H) X 1108(V) = 2,227,080
Effective Pixels	1944(H) X 1092(V) = 2,122,648
Scanning System	PROGRESSIVE
S/N (Y signal)	More than 52 dB (AGC Off)
Video Output	SMPTE292M (HD-SDI) / CVBS: 1.0Vp-p (75ohm)
Min.Illumination	1 Lux at F1.2 / 0.1 Lux (B/W)
White Balance	AUTO / AUTO EXT / PUSHING / MANUAL
Electronic shutter speed	Auto / Manual (1/30sec ~ 1/30,000sec)
Brightness	ADJUSTABLE (0 ~ 20 STEP)
SENS_UP	OFF / X2 / X3 / X4
DNR	OFF / LOW / MIDDLE / HI
WDR/BLC	OFF / WDR / BLC
HLM	OFF / SET
ACE	OFF / ON
Day & Night	Auto (Day ←→ Night TIME Change), COLOR, B/W
Privacy	OFF / ON (28 Zone)
Motion Detection	OFF / ON
D.ZOOM	0 ~ X112
FLIP	OFF / ON
FREEZE	OFF / ON
Language	ENGLISH
Sharpness	ADJUSTABLE (0 ~ 10 STEP)
Mirror	ON / Off
COMM.	RS-485(PELCO-D)
Operating Temperature/Humidity	-10°C~+50°C / 30%~80% RH
Storage Temperature/Humidity	-20°C~+60°C / 20%~90% RH
Power	DC12V Only
Distance	100 ~ 150m
Transmission range	Max transmission range is depends on the cable manufacturer and the installation environment.

## INSTALLATION


1. Opening  
Use the coin to open the cover.
2. Place the camera in the desired location and install using the screws supplied.

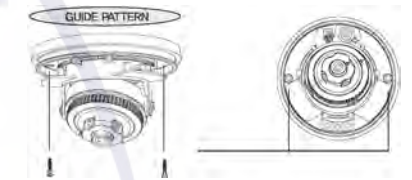

## 3. Connecting Cables

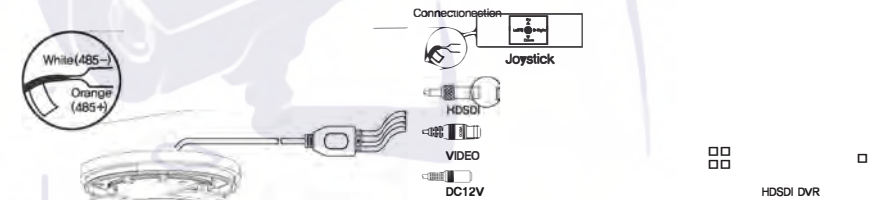

## 4. Pan / Tilt (3Axis) Controls



## 5. Closing the cover

