




Model	AW-IHS-0202
<b>IP Camera Compatibility</b>	
Video Resolution	Megapixel/D1/VGA
Video Compression	MJPEG/MPEG-4/H.264/H.265
<b>Ethernet</b>	
Fast Ethernet 10/100Mbps (RJ45)	1
Fast Ethernet 100Mbps (Fiber)	SFP
<b>Standards</b>	
IEEE 802.3 10-BASE-T (Ethernet)	Supported
IEEE 802.3u 100-BASE-TX (Fast Ethernet)	Supported
IEEE 802.3x Flow Control (Full-Duplex Flow Control)	Supported
<b>Ethernet Performance</b>	
MAC Address	1 K
Buffer Memory	128 KB
Transmission Method	Store and Forward
Auto-MDI/MDI-X, Auto-Negotiation	Supported
<b>Filtering/Forwarding Rates</b>	
10Mbps	14,880 pps
100Mbps	148,000 pps

<b>Transmission Media</b>	
10Base T	Cat. 3, 4, 5 UTP/STP
100Base TX	Cat. 5, 5e UTP/STP
<b>General</b>	
LED Indicators	Power, LAN, Speed
Power Input	18V-36VAC or 12V-60VDC Power Input Removable Terminal Block
Power Consumption	2W
Housing	IP40 Design, High Graded Aluminum
Installation	DIN-rail Mounting and Wall Mounting
Dimensions	59 (L) x 49 (W) x 36 (H) mm
Weight	0.08 kg
Operating Temperature	-40°C ~ 75°C
Storage Temperature	-40°C ~ 85°C
Humidity	Operating: 5~95% (Non-condensing) Storage: 5~95% (Non-condensing)
Safety Certifications	CE, C-Tick, FCC, VCCI, LVD
<b>Accessory</b>	
Included Accessories	QIC, Terminal Block, DIN-rail Brackets, Wall Mount Kit

## Dimensions

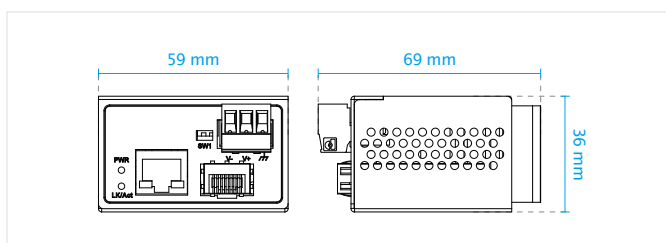

## Application Diagram

