




Model	AW-IHS-0201	100Mbps	148,000 pps
IP Camera Compatibility		Transmission Media	
Video Resolution	Megapixel/D1/VGA	10Base T	Cat. 3, 4, 5 UTP/STP
Video Compression	MJPEG/MPEG-4/H.264/H.265	100Base TX	Cat. 5, 5e UTP/STP
Ethernet		General	
Fast Ethernet 10/100Mbps (RJ45)	1	LED Indicators	Power, LAN, Speed
Fast Ethernet 100Mbps (Fiber)	SC Single-mode 30 km	Power Input	18V-36VAC or 12V-60VDC Power Input Removable Terminal Block
Standards		Power Consumption	2W
IEEE 802.3 10-BASE-T (Ethernet)	Supported	Housing	IP40 Design, High Graded Aluminum
IEEE 802.3u 100-BASE-TX (Fast Ethernet)	Supported	Installation	DIN-rail Mounting and Wall Mounting
IEEE 802.3x Flow Control (Full-Duplex Flow Control)	Supported	Dimensions	2.32 inch (5.89 cm) (L) x 1.93 inch (4.9 cm) (W) x 1.42 inch (3.61 cm) (H)
Ethernet Performance		Weight	0.18 lb (0.08 kg)
MAC Address	1 K	Operating Temperature	-40 °F (-40 °C) ~ 167 °F (75 °C)
Buffer Memory	128 KB	Storage Temperature	-40 °F (-40 °C) ~ 185 °F (85 °C)
Transmission Method	Store and Forward	Humidity	Operating: 5~95% (Non-condensing) Storage: 5~95% (Non-condensing)
Auto-MDI/MDI-X, Auto-Negotiation	Supported	Safety Certifications	CE, C-Tick, FCC, VCCI, LVD
Filtering/Forwarding Rates		Accessory	
10Mbps	14,880 pps	Included Accessories	QIG, Terminal Block, DIN-rail Brackets, Wall Mount Kit

Dimensions

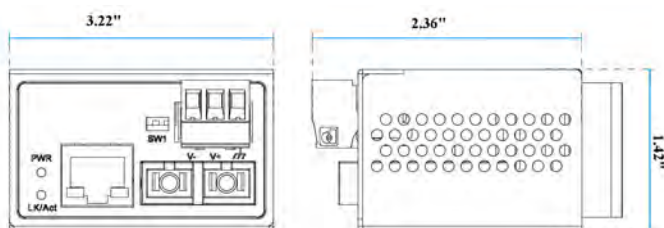

Application Diagram

