

- Extends range of Ethernet IP network from 328 feet (100 m) to 2 miles (3 km)
- No in-field optical adjustments required
- AC/DC powered
- Lifetime Warranty

The FMC Series provides a low-cost and effective solution for extending the range of your video network. The FMC-TRM-A and B Ethernet 2-port media converters are designed to transmit and receive 10/100 Mbps data over multimode optical fiber. The electrical interface will Auto-Negotiate to a 10 Mbps, or 100 Mbps Ethernet rate without any adjustments. The optical interface operates at a 100 Mbps Ethernet rate.

Ordered as a pair, with a set consisting of one A and one B model, these media converters are environmentally hardened to operate in extreme temperatures. LED indicators are provided for rapidly ascertaining equipment operating status. The units are small sized for surface mounting where space is at a premium.



Specifications

Data Transmission

Data Interface:	Ethernet
Data Rate:	10/100 Mbps Optical Port supports Full Duplex; Electrical port supports Auto-Negotiation for 10 Mbps or 100 Mbps, full duplex or half duplex data. Automatic medium dependent interface crossover (MDI/MDI-X)
Number of Fibers:	1
Wavelength:	10/100 Mbps Ethernet (1550 nm/1310 nm)
Fiber Type:	Multimode
Fiber Connectors:	ST
Transmission Distance:	2 miles (3 km)
Optical Power Budget	10 dB

Connectors

Optical	ST Connector, 1 Fiber
Power:	Terminal Block
Electrical:	RJ-45
LED Indicators:	- Optical Link/Data Activity - Electrical Link/Data Activity - Power


Electrical & Mechanical

Power Requirements:	22-27 VAC @ 0.5 A or 8-24 VDC @ 1 A
Current Protection:	Automatic Resettable Solid-State Current Limiters Meets IPC Standard
Circuit Board Protection:	Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
Certifications:	CE; FCC Class A; UL and RoHS compliant.

Environmental

MTBF:	>100,000 hours
Operating Temp:	-40°C to +75°C
Storage Temp:	-40°C to +85°C
Relative Humidity:	0% to 95% (non-condensing)*
Compliance:	IEEE 802.3 compliant. Designed to meet full compliance with the environmental requirements (ambient operating temperature, mechanical shock, vibration, humidity with condensation, high- line/low-line voltage conditions and transient voltage protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.

* May be extended to condensation conditions.

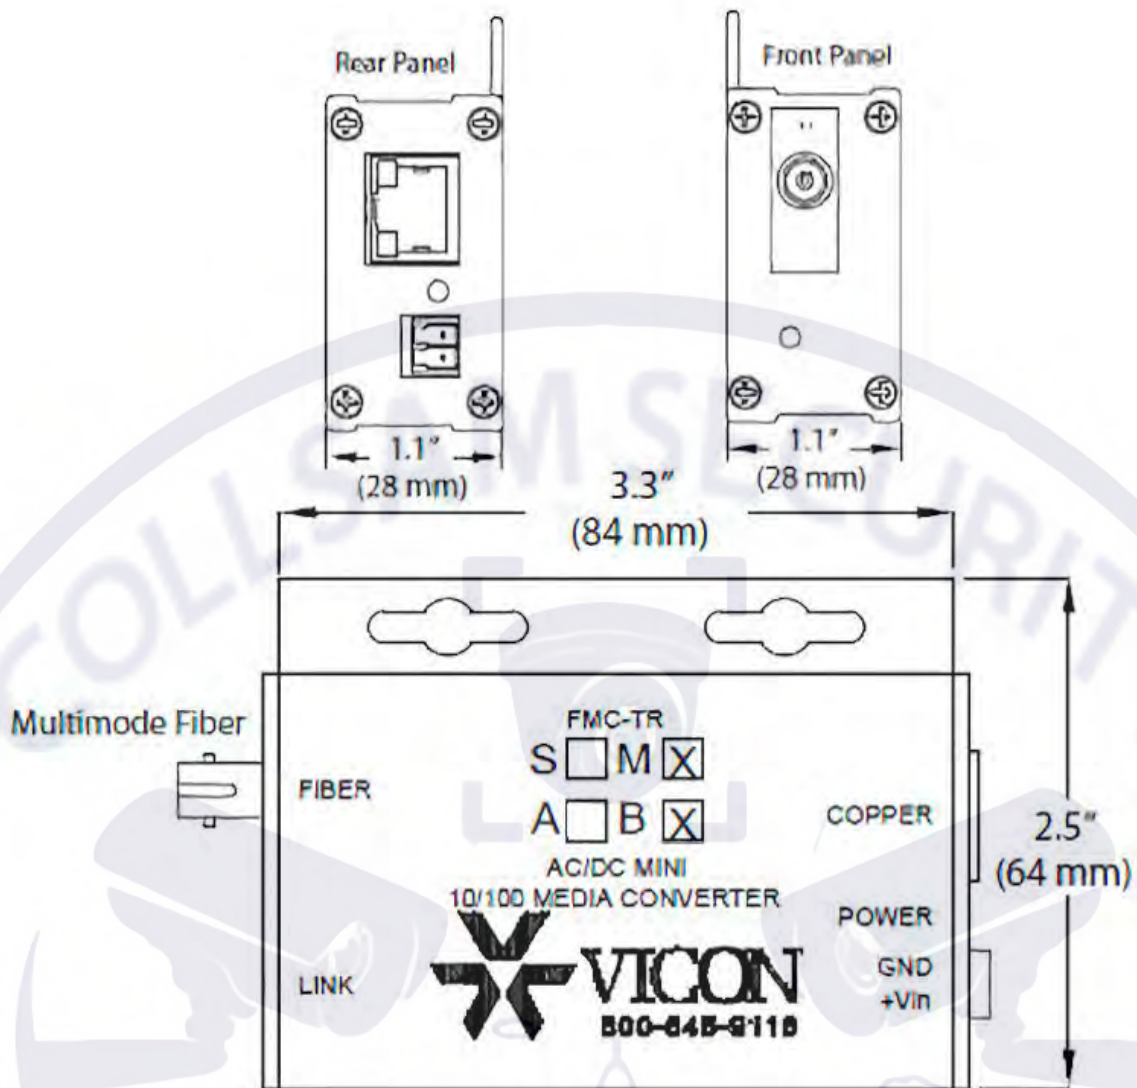

Ordering Information

Model Number	Description
FMC-TRM-A	10/100 Mbps Ethernet, 2-Port, AC/DC powered, Mini Media Converter utilizing ST connectors (1310 nm) with power supply. Ordered as a set with one A and one B model required.
FMC-TRM-B	10/100 Mbps Ethernet, 2-Port, AC/DC powered, Mini Media Converter utilizing ST connectors (1550 nm) with power supply. Ordered as a set with one A and one B model required.
Optional	Add additional "/C" for Conformally Coated Circuit Boards (extra charge, consult factory)