



- Extends range of Ethernet IP network from 328 feet (99.97 m) to 2 miles (3,218.69 m)
- 10/100 Mbps Ethernet
- AC/DC Powered
- Utilizes ST Connectors (1310 nm) with Power Supply
- Multimode Fiber
- No in-field optical adjustments required
- Hot-swappable rack modules
- Interchangeable between standalone or rack-mount use
- Lifetime warranty

The FMC Series provides a low-cost and effective solution for extending the range of your video network. The FMC-TRRM-A and B Ethernet 2-port media converters are designed to transmit and receive 10/100 Mbps Ethernet data over multimode optical fiber. The electrical interface will Auto-Negotiate to a 10 Mbps or 100 Mbps Ethernet rate without any adjustments. The optical interface operates at a 100 Mbps Ethernet rate.

Ordered as a pair, with a set consisting of one A and one B model, these media converters are environmentally hardened to operate in extreme conditions. LED indicators are provided for confirming equipment operating status. These units may be wall or rack mounted using the optional FMC-RK Rack-Mount Card Cage.

## Specifications

### Data Transmission

<b>Data Interface:</b>	Ethernet
<b>Data Rate:</b>	10/100 Mbps Ethernet Optical Port supports Full Duplex; Electrical port supports Auto-Negotiation for 10 Mbps or 100 Mbps, full duplex or half duplex data. Automatic medium dependent interface crossover (MDI/MDI-X)
<b>Number of Fibers:</b>	1
<b>Wavelength:</b>	10/100 Mbps Ethernet (1310 nm/1550 nm)
<b>Fiber Type:</b>	Multimode
<b>Fiber Connectors:</b>	ST
<b>Transmission Distance:</b>	2 miles (3 km)

### Connectors

<b>Optical</b>	ST Connector, 1 Fiber
<b>Power:</b>	Terminal Block
<b>Electrical:</b>	RJ-45
<b>LED Indicators:</b>	- Optical Link/Data Activity - Power


### Electrical and Mechanical

<b>Power Requirements:</b>	9 VDC supplied from rack. For external power supply, 8- 24 VDC @ 1 A.
<b>Current Protection:</b>	Automatic Resettable Solid-State Current Limiters
<b>Circuit Board Protection:</b>	Meets IPC Standard Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
<b>Certifications:</b>	CE; FCC Class A; UL and RoHS compliant

### Environmental

<b>MTBF:</b>	>100,000 hours
<b>Operating Temp:</b>	-40°C to +75°C
<b>Storage Temp:</b>	-40°C to +85°C
<b>Relative Humidity:</b>	0% to 95% (non-condensing)* IEEE 802.3 compliant.
<b>Compliance:</b>	Designed to meet full compliance with the environmental requirements (ambient operating temperature, mechanical shock, vibration, humidity with condensation, high-line/low-line voltage conditions and transient voltage protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.

\* May be extended to condensation conditions.

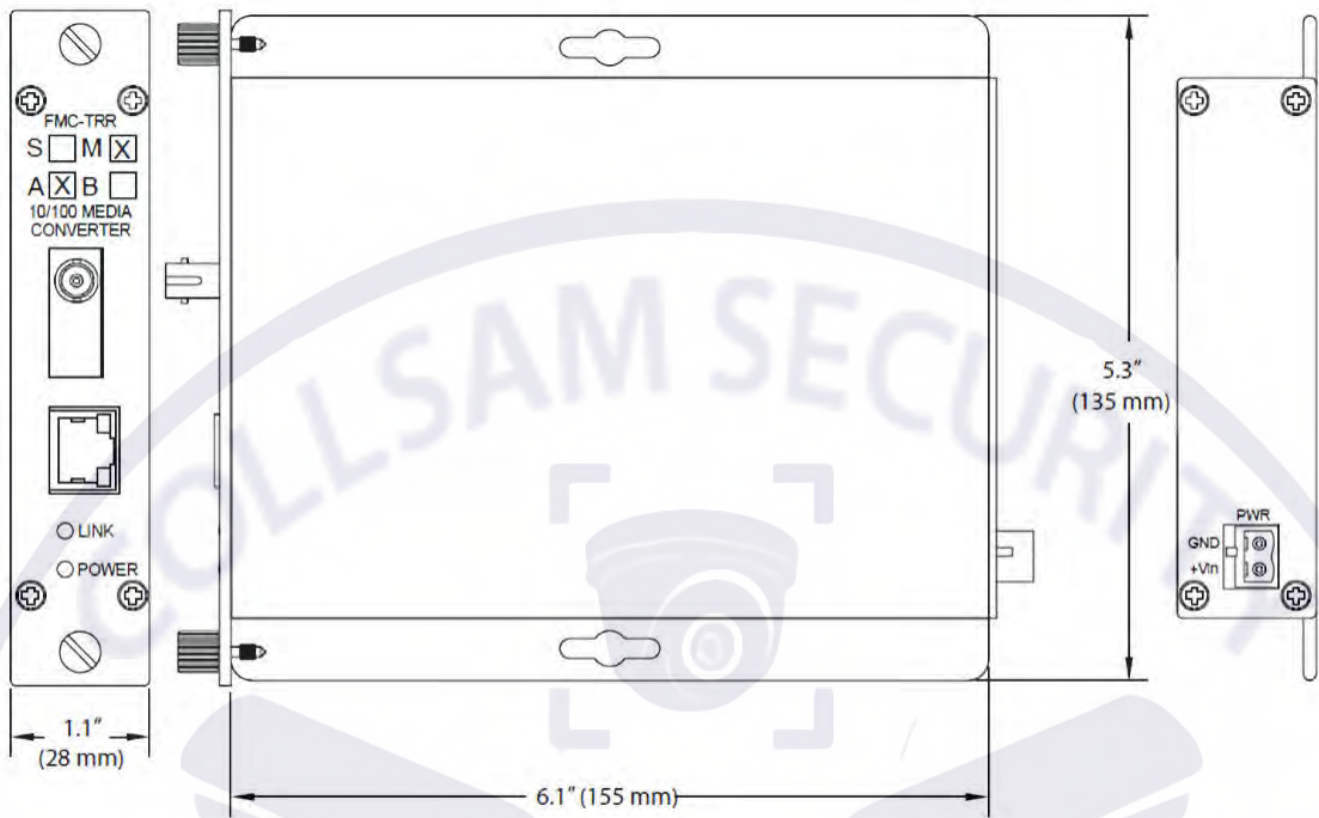

EST.



1998

WE SECURE YOUR LIFE

