


Dimensions

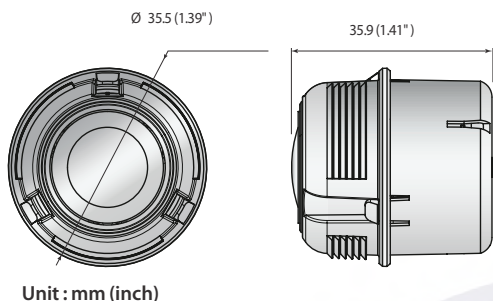

Unit : mm (inch)

Key Features

- 5MP
- 1/1.8" CMOS
- 0.16Lux @ Color, B/W
- WDR 120dB,
- Day & Night (Electrical)
- 3.7, 4.6, or 7.0mm fixed lens



Lens Model	SLA-5M3700D	SLA-5M4600D	SLA-5M7000D
VIDEO			
Imaging Device	1/1.8" 5MP CMOS	1/1.8" 5MP CMOS	1/1.8" 5MP CMOS
Effective Pixels	2616(H) x 1976(V)	2616(H) x 1976(V)	2616(H)x1976(V)
Minimum Illumination	Color : 0.16Lux (F1.6, 1/30sec, 30IRE) B/ W : 0.16Lux (F1.6, 1/30sec, 30IRE)	Color : 0.16Lux (F1.6, 1/30sec, 30IRE) B/W : 0.16Lux (F1.6, 1/30sec, 30IRE)	Color : 0.16Lux(F1.6, 1/30sec, 30IRE) B/W : 0.16Lux (F1.6, 1/30sec, 30IRE)
LENS			
Focal Length	3.7mm fixed focal	4.6mm fixed focal	7.0mm fixed focal
Maximum Aperture Ratio	F1.6	F1.6	F1.6
Angular Field of View	H : 97.5°, V : 71.9°, D : 126.2°	H : 77.9°, V : 57.9°, D : 98.7°	H : 50.7°, V : 37.8°, D : 63.8°
Lens Type	Fixed focal	Fixed focal	Fixed focal
PAN / TILT / ROTATE			
Pan / Tilt / Rotate Range	-90°~+90° / +36°~+73° / -180°~+180°	-90°~+90° / +21°~+85° / -180°~+180°	-90°~+90° / +12°~+93° / -180°~+180°
OPERATIONAL			
Wide Dynamic Range	120dB	120dB	120dB
Day & Night	Auto (Electrical)	Auto (Electrical)	Auto (Electrical)
MECHANICAL			
Color / Material	Black / Plastic	Black / Plastic	Black / Plastic
Product dimensions	Ø 1.40 inches (35.56 mm) x 1.41 inch (35.81 mm)	Ø 1.40 inches (35.56 mm) x 1.41 inch (35.81 mm)	Ø 1.40 inches (35.56 mm) x 1.41 inch (35.81 mm)
weight	0.08 lb (36.29 g)	0.08 lb (36.29 g)	0.08 lb (36.29 g)