

# Mount Adapter

For use with Explosion-protected Bullet Camera




- 304 stainless-steel mount adapter
- DH-EPC230UN explosion-protected network camera and DH-EXB100 wall mount
- 110 lbs. (49.9 kg) Load Capacity
- Temperature: Suitable for extreme temperature environments
- Durable construction
- Easy installation
- Withstands extreme temperatures
- Heavy load capacity

Technical Specifications		Dimensions (mm)	
--------------------------	--	-----------------	--

Material	304 Stainless Steel
Dimensions	100.0 mm x 90.0 mm x 80.0 mm (3.94 in. x 3.54 in. x 3.15 in.)
Load Bearing Capacity	50.0 kg (110.23 lb)
Weight	0.50 kg (1.10 lb)
Operating Temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Humidity	Less than 95% RH

Technical Specifications		Dimensions (mm)	
--------------------------	--	-----------------	--

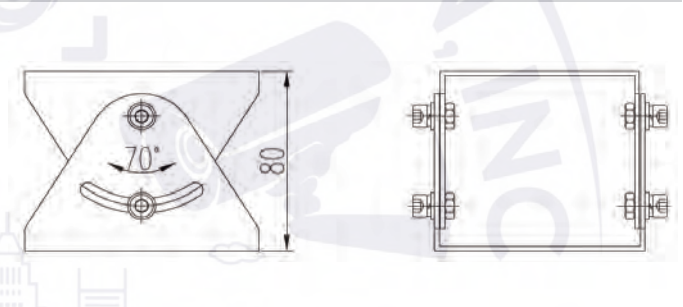

Ordering Information		
----------------------	--	--

Type	Part Number	Description
Mount Adapter	DH-ZAZ100W	Mount Adapter for use with Explosion-protected Bullet Camera and DH-EXB100 Wall Mount

