


Surface-mount Box

For use with DHI-VTO2202F-P

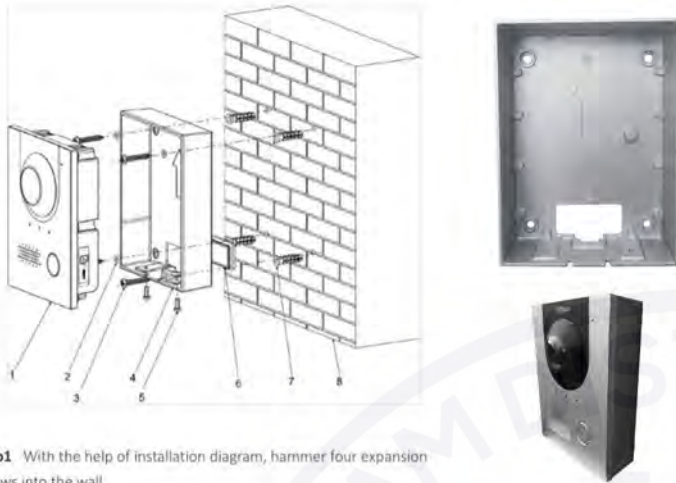

- Step1** With the help of installation diagram, hammer four expansion screws into the wall.
- Step2** Install the waterproof silica gel pad on the mounting box from the back of the mounting box.
- Step3** Put four waterproof rings on four ST4x25 self-tapping screws.
- Step4** Install the mounting box on the wall by screw the four ST4x25 self-tapping screws into the expansion screws.
- Step5** Put the VTO into the mounting box.
- Step6** Fix the VTO to the mounting box by screwing two M3x8 screws from the bottom of the mounting box.

The Dahua VTM115 is a surface mount box designed for use with the DHI-VTO2202F-P IP Outdoor Door Station. This box is constructed from aluminum alloy 5052 and has a thickness the surface mount box provides ample space for the mounting of the DHI-VTO2202F-P IP Outdoor Door Station, making it an ideal solution for outdoor applications locations. It is easy to install and maintain because of the design of the surface mount box.

The VTM115 is equipped with a waterproof seal that prevents the ingress of water and dust into the box. The interior of the box is kept at a stable temperature by an insulated backplate. The VTM115 also features a tough powder-coated finish that shields it from rust, sun damage, and nicks.

Distributed By

Collsam Distributions; Inc.
 Sales: (951) 282-8707 sales@Collsam.com
 Support: (213) 210-5744 support@Collsam.com
 Website: www.Collsam.com



The installation of the VTM115 is straightforward and expeditious. It comes with all the necessary mounting hardware, which makes installation easy. The wall-mounted box is made to work with most wall surfaces and requires minimal tools for installation.

Dahua Technology VTM115 Surface Mount Box

- To provide a reliable, easy-to-install solution for keeping your outdoor IP network safe for the DHI-VTO2202F-P IP Outdoor Station
- Made of aluminum for corrosion resistance
- IP68 rating for waterproof and dustproof protection
- Wide temperature range from -21 °F (-29.44 °C) to +140 °F (60 °C)
- Dimensions 5.08 inch (12.9 cm) (12.9 cm) x 3.74 inch (9.5 cm) x 1.12 inch (2.84 cm)

