




Features

- High density. The innovative enclosure with 477mm depth and 3U height that holds up to 16 disks, is space-saving and applicable to the standard rack-mounted scenarios.
- Power protection. Disk powered on sequentially during system startup, protection from impulse current.


Specifications

Model	DEU1016-B
Hard Disk	
SATA	16 SATA Interfaces
Capacity	Up to 24TB for each disk
External Interface	
miniSAS	1
RS232	1
Power Supply	AC 100~240V
Working Environment	
Working Temperature	-10 °C ~ +55 °C (+14 °F ~ +131 °F)
Working Humidity	5%~95% RH (non-condensing)
Power Consumption (With HDD)	< 160W(With 16 HDDs)
Dimensions	
Weight (Without HDD)	< 10Kg (22lb)
Dimensions	482mm × 477mm× 131mm (19.0"×18.8"×5.1")
Height	3U

Dimensions

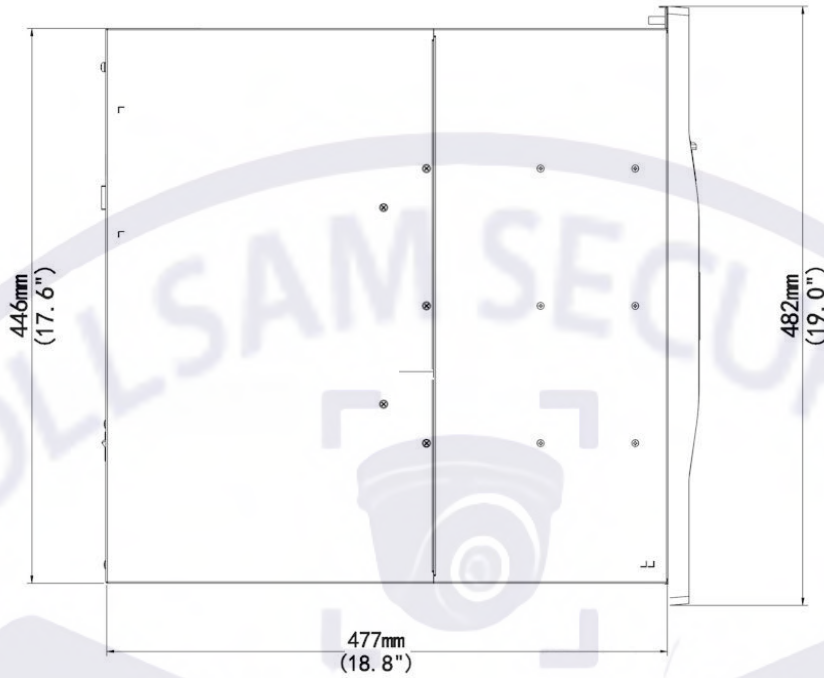

Rear Panel

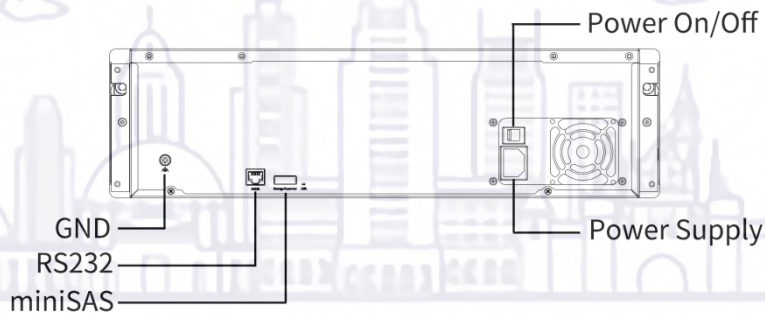

WE SECURE YOUR LIFE