


## DS-K182HP Pyramid Proximity Series Cascade Proximity Reader, 125kHz.



- MAXSecure™ Unique Security Feature:
  - Enhances access control with unparalleled security
  - Protects against unauthorized access
- Enhances the read range to achieve highly reliable authentication of authorized access
- Wiegand Output Interface:
  - Compatible with most access control systems
  - High-speed reading and data transmission
- Ideal Choice for Door Security:
  - It can be mounted as a mullion mount
  - Ideal for mounting on doors and entrances
  - Ensures efficient and secure access control for any building.

### Legend and Dimensions

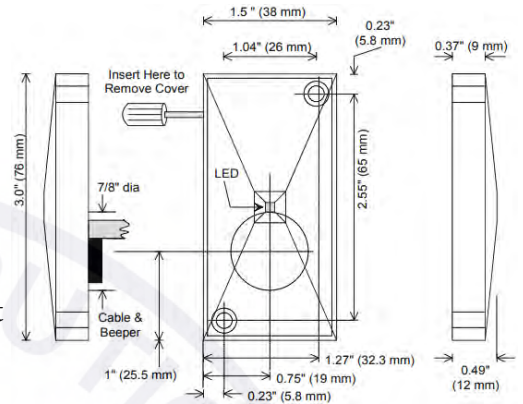

The Hikvision DS-K182HP Pyramid Proximity Series Cascade Proximity Reader is an ideal choice for door security. It provides enhanced security assurance in access control with its unique card reading capability. This 125kHz card reader access device works with proximity technology for consistent performance and reliable security.

An interesting feature of the DS-K182HP card reader access device is its advanced MAXSecure™ unique security feature. This feature ensures only genuine cardholders are granted access. It also contains a Read-Range Boosting Technology, which allows the reader to recognize a card from a longer distance and thus secure the entrance further.

#### DS-K182HP

#### System Parameters

Technology Proximity

Reading Frequency 125 kHz

Reading Range Up to 5 inches (126 mm)

Interface Wiegand 26

LED Four-state standard (red, green, amber, and off)

Mounting Mullions, including metal doors and window frames, as well as flat surfaces

Dimensions (W x H x D) 1.7" x 3.2" x 0.7" (43 mm x 81 mm x 18 mm)

OEM Label Area Dimensions (W x D) 0.9" x 0.35" (22.86 mm x 8.89 mm), with 0.63" (16 mm) corner radius

Weight 3 oz (85 g)

Certifications FCC, ICC, CE, C-Tick, UL 294 Standard<sup>1</sup>

IP Code IP67

Power Supply 5 to 16 VDC

Working Current 30 mA typical, 75 mA peak @ 12 VDC

Cabling 24 AWG minimum, multi-conductor stranded with an overall foil shield

Operating Temperature -40° to 149° F (-40° to 65° C)

Audio Tone Beeper included standard

Indoor and Outdoor Installation Electronics sealed in weather- and tamper-resistant epoxy potting

#### Distributed By

Collsam Distributions; Inc.

Sales: (951) 282-8707 sales@Collsam.com

Support: (213) 210-5744 support@Collsam.com

Website: www.Collsam.com

