


- One pack of 25 DS-K7M151-P Clamshell Proximity Cards
- Four DS-K182HP Proximity Readers
- One DS-K2604-G Access Controller
- Wiegand Communication Protocol
- Communication Encryption and Tamper-Proof Technology
- NVR/DVR Integration



DS-K2604-G Network Access Controller



DS-K7M151-P Clamshell Proximity Card

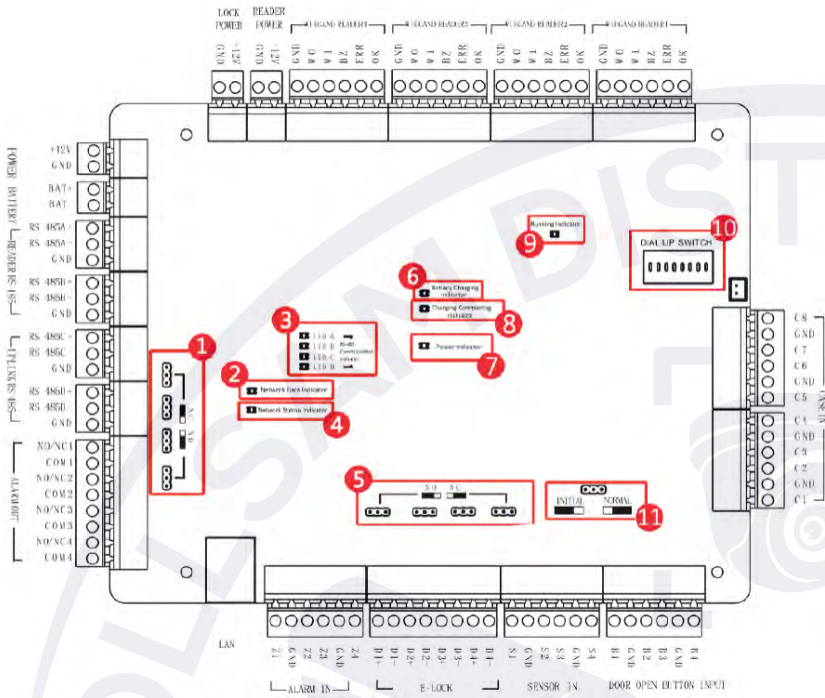

DS-K182HP Proximity Reader

Small businesses can use a tool called Hikvision DS-KIT4DRACP to control access for up to 25 employees. This kit combines three separate access control products into one comprehensive package, providing unbeatable value and convenience for business owners.

The kit includes the Network Access Controller DS-K2602-G, which serves as the brain of the system. It allows business owners to control which areas employees can enter from any place and at any time. The DS-K2602-G can be used to set up different access levels for employees and monitor entry and exit logs.

To complement the Network Access Controller, the DS-KIT4DRACP also includes two Proximity Card Readers DS-K182HP. Workers can enter and leave without using physical keys or keypads with these machines. The DS-K182HP readers also have built-in alarms that can be triggered in case of any unauthorized attempts to gain entry.

For added convenience, the kit also includes a Proximity Card Pack DS-K7M151-P, which contains 25 pre-programmed proximity cards. Easy and secure access to the designated areas of the building can be achieved with these cards. With the DS-K2602-G and DS-K182HP readers, these cards provide a comprehensive and efficient access control system for businesses.

One of the biggest advantages of the DS-KIT4DRACP access control kit is its compatibility with other Hikvision security products. This allows businesses to expand and customize their security system as their needs grow. Business owners without any prior technical knowledge can easily install and operate the kit because of the user-friendly software.

Specifications

DS-K2604-G	
Access Control	
External Card Reader	8 card readers (RS-485 Interface, Hikvision only); 4 card readers (Wiegand Interface, W26/34 Reader, or custom Wiegand via iVMS-4200 configuration)
Max Stored Cards	Cards information: 100,000 (200,000 expandable) Access control events : 300,000 (600,000 expandable)
Door Relay	Door relay × 4, provide up to 1 A to lock
Unlock Methods	Card/keypad/password/fingerprint/VMS
Alarm	
LED Indicator	Power supply status
Alarm Input	4
Case Input	8 dry contact
Alarm Output	4
Door Sensor and Exit Button	4x dry sensor 4x exit button
Tamper Alarm	1
Fire Relay	Fire relay × 1, cut off whole power
Connectivity	
Network Port	1x RJ-45 10/100/1000 Mbps (labeled as LAN 1)
Uplink Communication Interface	TCP/IP, RS-485
VMS	One iVMS-4200 (up to 16 devices, up to 10,000 persons, up to 5 cards for each person, up to 10 fingerprints per person, and 100,000 fingerprints in total), or one HikCentral v1.2 (up to 128 doors, up to 64 groups, and up to 1,000 person per group)
General	
Material	Aluminum alloy
Mounting	Surface mount
Processor	32-bit
Capacity	16M
Built-in Clock	Yes
Power Supply	110 to 220 VDC (Power Adapter Included)
Working Voltage	12 VDC/1 A
Power Dissipation (without Load)	≤4 W
Power Dissipation (with Load)	≤100 W
Battery	Support battery (12 VDC, 7.0 Ah, battery not included)
Working Temperature	-40° to 60° F (-40° C to 140° C)
Working Humidity	10% to 90%
Dimensions (L × W × H)	17.7" × 15.7" × 3.7" (450 mm × 400 mm × 93.7 mm)
Certifications	CE,FCC,UL294
Access Control Features	
Features	Supports multi-door interlocking function, anti-passback function (cross-controller anti-pass back, up to 64 devices), multiple authentication, first card, super card, and super password function
Week Schedule	Up to 128 devices
Holiday	16
Schedule Template	Up to 255 (up to 4 for One Card); up to 32 devices for HikCentral v1.2 (up to 4 for one door) Up to 255 for iVMS-4200 (up to 4 for one device, up to 4 permissions for one device)
Time Attendance	
Time And Attendance	Only in iVMS-4200 and HikCentral
iVMS-4200	Attention retention period result: one year; original data retention period: three months (Based on 10,000 cards); refer to the iVMS-4200 specifications for more details
HikCentral v1.2	Attention retention period result: one year; original data retention period: one year (Based on 10,000 cards); refer to the iVMS-4200 specifications for more details
Event Integration	
Supported Recorders	Hikvision I-Series NVR; Turbo 3.0 and 4.0 DVRs
Supported Recorder Firmware	NVR: v3.4.931_170913, Turbo 3.0 DVR: V3.4.85_170807, Turbo 4.0 DVR: v3.5.22_171102 *Customized version; available on us.hikvision.com/en; GUI 4.0 Support in Q3, 2018
Supported Features	Event Text Overlay for other IPC streams, search playback by access control event, search playback by card access event

DS-K182HP	
System Parameters	
Technology	Proximity
Reading Frequency	125kHz
Reading Range	Up to 5 inches (126 mm)
Interface	Wiegand ABA Track II
LED	Four-state standard (red, green, amber, and off)
Mounting	Mullions, including metal door and window frames, as well as flat surfaces
Dimensions (W x H x D)	1.7" x 3.2" x 0.7" (43 mm x 81 mm x 18 mm)
OEM Label Area Dimensions (W x D)	0.9" x 0.35" (22.86 mm x 8.89 mm), with corner radius of 0.63" (16 mm)
Weight	3 oz (85 g)
Certifications	FCC, ICC, CE, C-Tick, UL Standard 294
IP Code	IP67
Power Supply	5 to 16 VDC
Working Current	30 mA typical, 75 mA peak @ 12 VDC
Cabling	24 AWG minimum, multi-conductor stranded with an overall foil shield
Operating Temperature	40° F to 149° F (-40° C to 65° C)
Audio Tone	Beeper included standard
Indoor and Outdoor Installation	Electronics sealed in weather- and tamper-resistant epoxy potting

DS-K7M151-P	
System Parameters	
Technology	Proximity
Frequency	125kHz
Operation	Passive (no battery)
Type	Clamshell card
Formats	Wiegand (26-bit and custom formats) and ABA Track II magnetic stripe (clock and data)
Material	ABS
Color	Off-white
Slot Punch	Standard, vertical slot
Marking	Date code and ID
Read Range	Up to 8" (202 mm)
Technologies Supported	DS-K7M151-P: Pyramid Series Proximity®
Single Clamshell card Dimensions	2.2" W x 3.4" H x 0.06" D (56 mm x 86 mm x 1.5 mm)
Shipping Dimensions (25 Clamshell Cards)	3.5" W x 2.3" H x 1.8" D (88 mm x 57 mm x 46.8 mm)
Weight	Single clamshell card: 0.3 oz (9 g) Box of 25 clamshell cards 0.6 lbs (272 g)
Operating Temperature	-35° F to 122° F (-37° C to 50° C)
Humidity	0% to 95% (non-condensing)

EST.

1998

WE SECURE YOUR LIFE

