

Luminys S-1515A IP Speaker with PoE, 512TB MicroSD/TF Card Support



Key Features

- Aviation Aluminum With Stainless Steel Hanger
- Max. Connection Range: 100 m (328 ft)
- Max. Sound Pressure: 108 dB
- Signal-to-Noise Ratio: ≥ 75 dB
- IP66 Ingress Protection

Certifications and Compliance

- NDAA Compliant
- FCC

Learn More



View the Luminy access control product selector.

Microphone

Interface	Built-In Microphone Switch
Input Distance	≥ 3.0 m (9.8 ft)
Frequency Response	50 Hz to 12 KHz
Input Sensitivity	15 mV

Speaker

Maximum Sound Pressure	108 dB
Signal-to-Noise Ratio	≥ 75 dB
Frequency Response	250 Hz to 16 KHz
Field of Coverage	Horizontal: 70° Vertical: 100°
Amplifier	Built-In 15 W and 8 Ω Amplifier

Audio

Protocol	MP3, G.711a/u, G.722
----------	----------------------

Network

Interface	RJ-45
Protocol	TCP, UDP, ARP, ICMP, IGMP, DHCP, IGMP, HTTP, SIP
Storage	512 MB of Built-In Storage and MicroSD/TF Card Slot

Electrical

Power Supply	PoE+ (IEEE 802.3at), 24 VDC 1A (Standby)
Power Consumption	15 W

Construction


Net Weight	1.8 kg (4.0 lb)
Gross Weight	2.5 kg (5.5 lb)
Product Dimensions (L × W × H)	225.0 mm × 170.0 mm × 250.0 mm (8.9 in. × 6.7 in. × 9.8 in.)
Package Dimensions (L × W × H)	240.0 mm × 200.0 mm × 275.0 mm (9.5 in. × 7.9 in. × 10.8 in.)
Operating Temperature	−40 °C to +60 °C (−40 °F to +140 °F) 60% to 95% (RH), Non-Condensing
Protection Ratings	IP66
Material	Aluminum and Stainless Steel

Certifications and Compliance

Certifications	FCC
Compliance	NDAA

Dimensional Drawing

mm [in.]

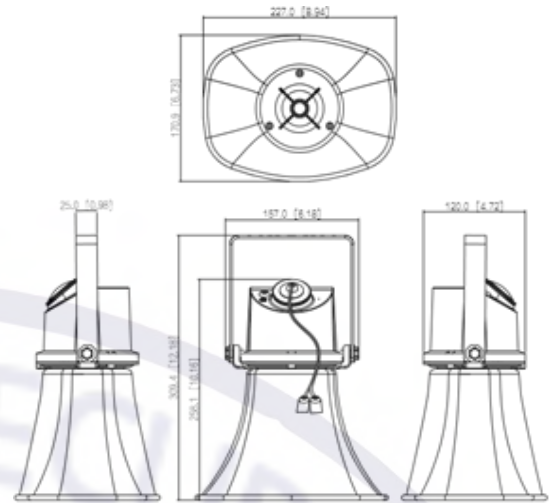

EST.

1998

WE SECURE YOUR LIFE