


# HA PW1609-8P

8 RJ-45 10/100M/1000M Gigabit with 8 POE Ports Switch with power adapter

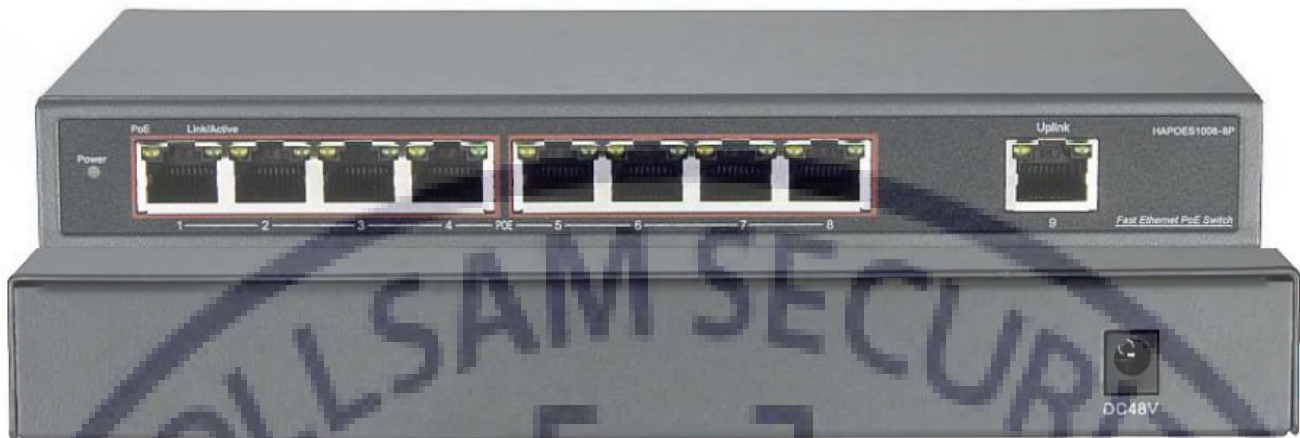

## Description

9 Ports support 4 PoE Gigabit Ethernet Switch is a security monitoring Ethernet Switches are designed to Ethernet HD monitor security systems and Ethernet projects. The product is fully integrated with the characteristics of the security monitoring, providing fast packet forwarding capability, the product is fully gigabit transfer rates provide enough bandwidth to ensure clear images, smooth transmission. Provide enough bandwidth demand for high-definition video.

EST.

1998

WE SECURE YOUR LIFE

## Features

- Conforms to IEEE802.3, IEEE802.3u, IEEE 802.3ab, IEEE802.3af, IEEE802.3at
- Provides 9 10/100/1000Base-TX ports
- Provides 8 PoE injector and 65W power adapter
- High back-plane bandwidth 10Gbps
- IEEE802.3x Flow control
- EMI standards complies with FCC, CE class B

# Unmanaged Fast-Ethernet Switch with PoE injector

## Specifications

HA PW1609-8P	
<b>POWER</b>	
Power Supply	External Power Supply
Voltage Range	DC 48V
Consumption	123.2W for PoE
<b>ETHERNET</b>	
Speed	1-8Port: 10/100/1000Mbps Uplink: 10/100/1000Mbps
Transmission Distance	100Meter (328ft)
<b>NETWORK SWITCH</b>	
Ethernet Standard	IEEE 802.3/802.3u/802.3ab/802.3af/at
Switching Capacity	18G
Transfer Rate	14,880 pps for 10Mbps 148,800 pps for 100Mbps 148,8000 pps for 1000Mbps
MAC Address	4K MAC address table
<b>LINK / ACT</b>	
Green on	The port is connecting
Blinks	The port is receiving or transmitting data
Green off	The port is not linked successfully with the device
<b>PoE</b>	
Orange on	PD is connected
Orange off	No PD is connected or power forwarding fails
PoEpin Assignment	V+ (RJ45 Pin 1,2) V- (RJ45 Pin 3,6)
<b>WORKING ENVIRONMENT</b>	
Working Temperature	0°C ~ 40°C
Storage Temperature	-40°C ~ 70°C
Humidity (Non-condensing)	0~85%
<b>MECHANICAL</b>	
Dimension (L x W x H)	218mm x 107mm x 29mm
Out Shell	Galvanized Sheet
Color	Gray