

COLOR IMAGE AT NIGHT WITH INTENSIFIED LOW LIGHT FUNCTION

SURFACE MOUNT



MADE IN KOREA


650 COLOR TVL  
0.01 NIGHT LUX

3-AXIS  
ANGLE ADJUSTMENT



FLUSH MOUNTABLE  
WITH EASY INSTALLATION

- 3-Axis Easy Angle Adjustment
- Day & Night Function
- 3.6mm Fixed Lens

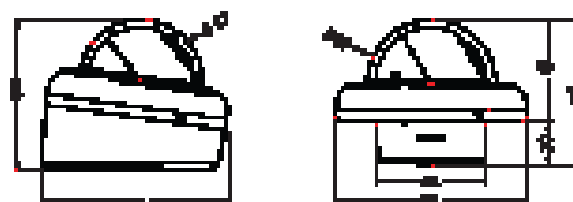

650 TV LINE

The camera is powered by NEXT chip-set that is embodied the top grade of the world at 650 TVL resolution be own image signal technology which is to change the frequency of luminance signal adaptively by a monitoring sector.

OSD CAMERA SETUP

The camera has a small program built-in to the camera to help users to setup the camera function without difficulties. No more reading a manual and tipping dip-switches to configure the camera.

3-AXIS DOME CONSTRUCTION

Accompanying with 3-Axis construction, the Dome camera can be rotated, shifted horizontally or vertically so you can position the camera to get the pictures you need.

- 1/3" Sony Super HAD II CCD
- 3.6mm Fixed Lens
- 650 TV Line in Color
- OSD - On Screen Display - Easy camera setup
- SDNR (digital noise reduction) / Day & Night
- Auto White Balance (AWB) / Back Light Compensation (BLC) / Auto Gain Control (AGC)
- DC 12V

	AT 162
Lens	3.6mm Fixed
Auto IR-Cut Filter Removal (ICR)	No
Resolution	650 TV Line (COLOR)
Sensor	Sony 1/3 inch Super HAD II CCD
Total Pixels	811(H) x 508(V) 410K Pixel
Effective Pixels	768(H) x 494(V) 380K Pixel
Scanning System	2:1 Interlace
Synchronization	Internal
Frequency	Horizontal : 15.734Khz / Vertical : 59.94Hz
S/N (Y signal)	More than 50 dB (AGC off)
Video Output	CVBS : 1.0Vp-p / 75 ohm
Min. Illumination	0.1 Lux at F1.2 (Color) / 0.01 Lux (B/W)
White Balance	ATW / AWC / Push / Manual
Electronic Shutter Speed	Auto / Manual 1/60 sec ~ 1/120,000 sec (NTSC)
O.S.D	Built-in
Backlight Compensation (BLC)	Low / Middle / High / Off Selectable
Gain Control	Low / Middle / High / Off Selectable
SDNR (Digital Noise Reduction)	Low / Middle / High / Off Selectable
Day & Night	Auto / COLOR / BW / CDS
Privacy Mask	On / Off (6 Zone)
Motion detection	On / Off
Sync	Internal / Auto
Operating Temperature / Humidity	-10°C~+40°C(14°F ~ 104°F) / 30% ~ 80% RH
Storage Temperature / Humidity	-20°C~+60°C(-4°F ~ 140°F) / 20% ~ 90% RH
Power	DC 12V
Casing / Dimensions	Aces Case (IP68) / 3.3"(D) x 2.76"(H) (Surface Mount) 3.3"(D)x 1.77"(H) (Flush Mount)

AT 162

DC 12V / 650TVL / 3.6mm Fixed Lens / Small Case

Specifications may change without a prior notice. All the images on the page are for illustrative purpose only, may not representing actual products. All the rights for the registered trademarks are reserved for their respectable owners. Not responsible for any typographical errors.