


HDCVI Starlight Dome Camera

2MP Starlight HDCVI IR Dome Camera

HDCVI



- 1/2.8" 2.1MP CMOS sensor
- 30 fps at 1080p, 30/60 fps at 720p
- Long distance real-time transmission
- HD and SD dual-output (SDI optional), SD Tester out
- OSD menu, control over coaxial cable
- 120 dB True WDR (Wide Dynamic Range)
- Day/Night (ICR)
- 3D-DNR (3D Digital Noise Reduction)
- AWB (Auto White Balance)
- AGC (Automatic Gain Control)
- BLC (Back Light Compensation)
- 2.7-12mm Varifocal motorized lens, auto iris
- Smart IR
- IP67 ingress protection
- IK10 vandal-resistant enclosure

System Overview

Experience the superior clarity of Full HD 1080p video while leveraging your existing coaxial infrastructure. The camera features 120 dB True WDR for applications under complex dynamic range and presents high quality images with clear details and accurate color rendition. The camera offers a multi-language on-screen display and HD and SD dual-output. The outstanding performance and easy installation make the camera an ideal choice for mid- to large-size businesses and for projects where highly reliable surveillance and construction flexibility are valued.

Functions

Four Signals over a Single Coaxial Cable

HDCVI technology simultaneously transmits four signals (audio, video, power, and data)¹ over a single coaxial cable. Dual-way data transmission allows the HDCVI camera to communicate with an HCVR to send control signals or to trigger alarms. Moreover, HDCVI technology supports PoC for construction flexibility.

Long Distance Transmission

HDCVI technology guarantees real-time transmission over long distances without loss of video quality. The camera supports transmission up to 700 m (0.43 miles) via coaxial cable, and up to 300 m (0.19 miles) via UTP cable.²

Simplicity

HDCVI technology seamlessly integrates traditional analog surveillance systems with upgraded, high-quality HD video, making it the best choice to protect security investments. The plug and play approach enables full HD video surveillance without the hassles of configuring a network.

Starlight

With the adoption of a high-performance sensor, the camera is able to provide incomparable performance even under extreme lowlight environment. The starlight feature allows more details to be captured and accurate color to be recognized at night or in scenes with limited illumination.

Wide Dynamic Range

For applications with both bright and low lighting conditions that change quickly, True WDR (120 dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Multi-interfaces

The camera is designed with multi-interfaces for transmitting/receiving various signals. It supports HDCVI and CVBS video outputs simultaneously with two BNC connectors, and a tester interface for debugging. It also supports audio input interface as well as alarm input/output for connecting external devices.

Smart IR

With IR illumination, detailed images can be captured in low light or total darkness. The camera's Smart IR technology adjusts the intensity of camera's infrared LEDs to compensate the distance of an object. Smart IR technology prevents IR LEDs from whitening out images as they come closer to the camera. The camera's integrated infrared illumination provides high performance in extreme low-light environments up to 50 m (164 ft).

Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust with IP67, making it suitable for indoor or outdoor environments. The camera complies with IK10 impact resistant rating to provide maximum durability against vandals, making it capable of withstanding the equivalent of 55 kg (120 lbs) of force.

Supporting $\pm 25\%$ input voltage tolerance, this camera suits even the most unstable power supply conditions. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

¹. Audio input is available for certain HDCVI cameras.

². Actual results verified by real-scene testing in Dahua's test laboratory.

Technical Specification

Camera

Image Sensor	1/2.8-in. CMOS
Effective Pixels	1945(H) × 1097(V), 2.1 MP
Scanning System	Progressive
Electronic Shutter Speed	1 s to 1/30000 s
Minimum Illumination	0.005 Lux @ F1.4 0 Lux (IR on)
S/N Ratio	More than 65 dB
IR Distance	Up to 50 m (164 feet)
IR On/Off Control	Auto / Manual
IR LEDs	3

Lens

Lens Type	Motorized lens / Auto iris
Mount Type	Board-in
Focal Length	2.7 mm to 12 mm
Max Aperture	F1.4
Angle of View	H: 95° to 36°
Focus Control	Auto / Manual
Close Focus Distance	300 mm (11.81 in.)

Pan / Tilt / Rotation

Pan/Tilt/Rotation	Pan: 0° to 355° Tilt: 0° to 65° Rotation: 0° to 355°
-------------------	--

Video

Resolution	1080p (1920 × 1080)
Frame Rate	25/30 fps @ 1080p 25/30/50/60 fps @ 720p
Video Output	One (1) BNC HDCVI High-definition Channel and, One (1) BNC CVBS Channel, plus One (1) CVBS Tester Channel
Day/Night	Auto (ICR) / Manual
OSD Menu	Multi-language
BLC Mode	BLC / HLC / WDR
WDR	120 dB
Gain Control	AGC
Noise Reduction	2D / 3D
White Balance	Auto / Manual
Smart IR	Auto / Manual

Certifications

Certifications	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 Subpart B), ANSI C63.4-2014 UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
----------------	---

Interface

Audio Interface	One (1) Channel In
Alarm Interface	One (1) Alarm Channel In One (1) Alarm Channel Out

Electrical

Power Supply	AC 24V±25% / DC 12V±25%
Power Consumption	Max 12.5 W (12V DC, IR on)

Environmental


Operating Conditions	-30°C to +60°C (-22°F to +140°F), Less than 90% RH Initiate start up above -30°C (-22°F)
Storage Conditions	-30°C to +60°C (-22°F to +140°F), Less than 90% RH
Ingress Protection	IP67
Vandal Resistance	IK10

Construction

Casing	Aluminium
Dimensions	Φ159.1 mm × 117.9 mm (Φ6.26 in. × 4.64 in.)
Net Weight	0.90 kg (1.98 lb)
Gross Weight	1.20 kg (2.65 lb)


Ordering Information		
Type	Part Number	Description
2MP Camera	DH-HAC-HDBW32A1EN-Z	2MP Starlight HDCVI IR Dome Camera, NTSC
Accessories	PFA138	Junction box (for use alone)
	PFA101	Mount adapter (For use with PFB302S wall mount or with PFB302S and PFA152 pole mount or with PFB300C ceiling mount)
	PFB302S	Wall mount (For use with PFA101 mount adapter or with PFA101 and PFA152 pole mount)
	PFA152	Pole mount (For use with PFA101 and PFB302S wall mount)
	PFB300C	Ceiling mount (For use with PFA101 mount adapter)
	PFB201C	In-ceiling mount (For use alone)

Dimensions (mm/inch)

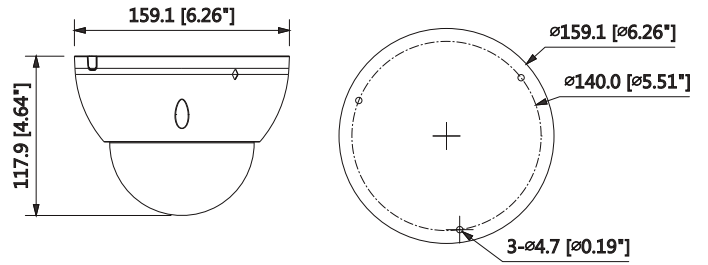

Accessories

Optional:

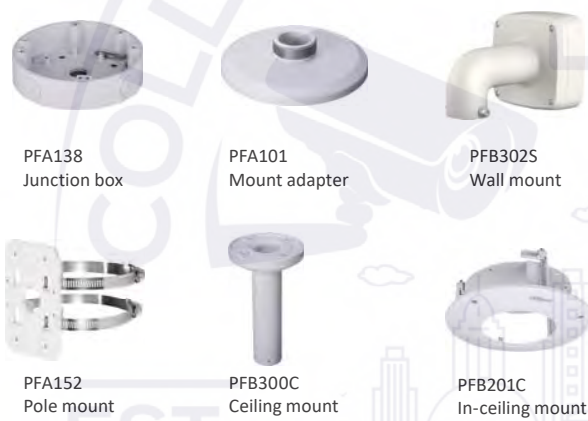

In-ceiling Mount	Junction Mount	Pole Mount
PFB201C	PFA138	PFA101 + PFB302S + PFA152
Ceiling Mount PFA101 + PFB300C	Wall Mount PFA101 + PFB302S	