


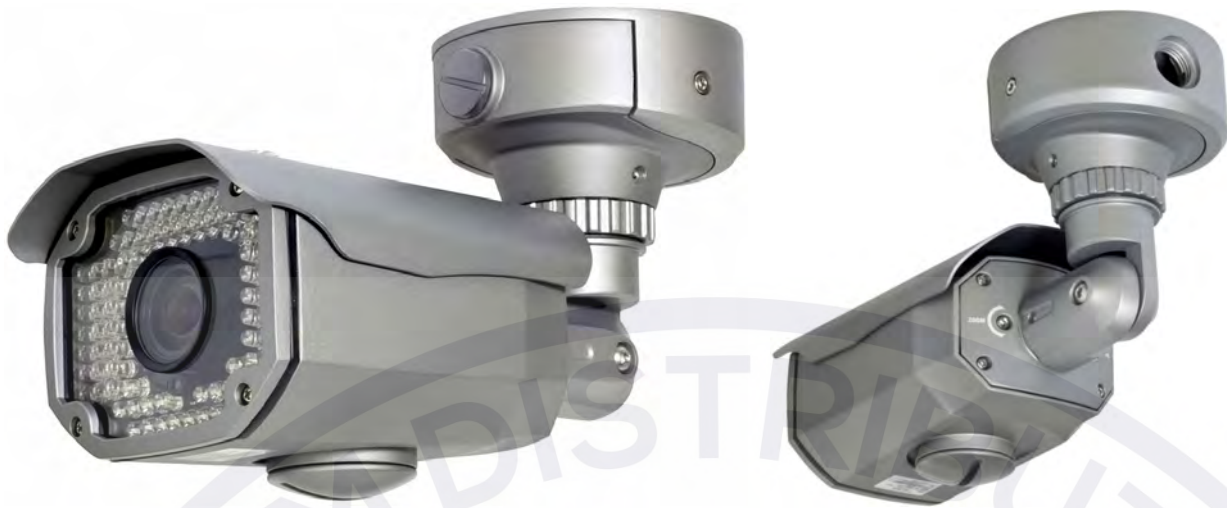

- 1/2.9 inch SONY CMOS (IMX-222 • IMX-322) HD-SDI (1080P • 720P • 720P CROP)
- EX-SDI Extended Serial Digital Interface
- 0 Lux at IR On
- IR LEDs 80 pcs
- Upgraded Waterproof Housing (IP68 rating) OSD Controlled
- DNR (Digital Noise Reduction)
- Smart IR
- Digital WDR (Wide Dynamic Range)
- Day and Night (ICR Option)
- Digital ZOOM
- Privacy
- Image Conversion
- Easy Installation
- 2.8~12 mm Varifocal Lens

Introducing the Eyemax UIR-2284V 2.1MP 1080P EX-SDI/HD-SDI IR Bullet Camera, the ultimate surveillance solution for your security needs. This camera is superb and has numerous features. It can be used both inside and outside. With its sleek silver finish and powerful specs, this camera is a game-changer in the world of security cameras.

The Eyemax UIR-2284V camera has two lenses that are 1/2.9-inch SONY CMOS IMX-222 and IMX-322. They produce clear pictures at 2.1MP 1080P resolution. This allows you to capture every detail, making it easier to identify people and objects in the footage. There is no signal loss or interference with the HD-SDI Extended Serial Digital Interface (1080P, 720P, CROP)

SPECIFICATIONS

Resolution	1080P, 720P
Sensor	1/2.9 inch SONY CMOS (IMX-222 / IM × 322)
Total Pixels	2000(H) × 1241(V) = 2,482,000
Effective Pixels	1944(H) × 1092(V) = 2,122,648
Scanning System	PROGRESSIVE
S/N (Y signal)	More than 52 dB (AGC Off)
Video Output	SMPTE292M (HD-SDI) / (CVBS: 1.0Vp-p (75ohm) : Option) (TVI : OPTION)
Min. Illumination	IR PRODUCT : 0 Lux at IR On 1 Lux at F1.2 / 0.1 Lux (B/W)
White Balance	AUTO / AUTO EXT / PRESET / MANUAL
Electronic shutter speed	AUTO / MANUAL (1/30sec ~ 1/30,000sec) / Flicker
SENS_UP	OFF / × 2 / × 4 / × 8 / × 16 / × 32
DNR	OFF / LOW / MIDDLE / HIGH
BACKLIGHT	OFF / WDR / BLC / HLC
ACE	OFF / LOW / MIDDLE / HIGH
Day & Night	AUTO (Day <--> Night TIME Change) , COLOR , B/W, EXTERN
PRIVACY / FLIP / FREEZE	OFF / ON
MOTION / DEFOG	OFF / SET
D.ZOOM	x1.0 ~ × 16.0
Language	ENG, CHN, CHN(S), JPN, KOR
Sharpness / Brightness	ADJUSTABLE (Sharpness : 0 ~ 10 STEP / Brightness : 0 ~ 20 STEP)
COMM.	RS-485(PELCO-D)
Temperature/Humidity	Operating (14°F ~ 122°F(−10°C ~ 50°C) / 30% ~ 80% RH) / Storage (−4°F ~ 140°F(−20°C ~ 60°C) / 20% ~ 90% RH)
Power	AC24V / DC12V Dual Power
signal Transmission	The distant difference is occurred according to cable option and other circumstances. (based on 5C-HFBT : HD-SDI (200M) / EX-SDI (400M))