

HDSDI

1080P IR BULLET CAMERA

COB IR



CRISP & BEAUTIFUL IR IMAGE AT NIGHT



XIR 2362FV-B Gray

SINGLE POINT LOCK

3-AXIS ADJUSTMENTS / SINGLE SCREW LOCKING MECHANISM

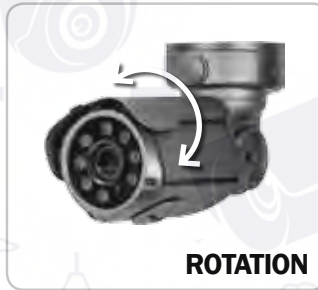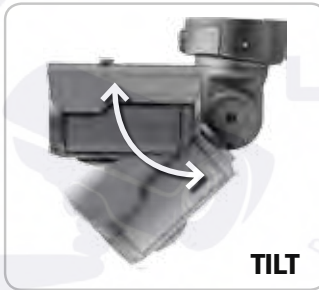

EASY ACCESS OSD & CONFIGURATION




FEATURES

- 1080p FULL HD Flawless Video
- 1/2.9" Sony CMOS
- 6~50mm Auto-Iris Vari-Focal Lens
- 0 Lux at IR On (High Power LED 12 pcs)
- Upgraded Waterproof Housing (IP68 Rating)
- Auto Removable IR-Cut Filter (ICR) : True Day & Night
Deep color and clear video at both day and night time
- Smart IR / DNR (Digital Noise Reduction)
- RS-485 Option
- Easy Installation
- DC 12V

XIR 2362FV


| | |
|---------------------------|--|
| Resolution | 1080p, 720p, 720p CROP |
| Sensor | 1/2.9 inch Sony CMOS |
| Total Pixels | 2000(H) × 1241(V) = 2,482,000 |
| Effective Pixels | 1944(H) × 1092(V) = 2,122,648 |
| Scanning System | Progressive |
| S/N (Y Signal) | More than 52 dB (AGC Off) |
| Video Output | TVI / CVBS: 1.0Vp-p (75ohm) |
| Min. Illumination | IR Product: 0 Lux at IR On General Product: 1 Lux at F1.2/0.1 Lux (B/W) |
| White Balance | Auto / Auto Ext / Preset / Manual |
| Shutter | Auto / Manual (1/30sec ~ 1/60,000sec) |
| Brightness | Adjustable (0~20 Step) |
| Sens Up | OFF / X2 / X3 / X4 / X5 / X6 / X7 / X8 |
| DNR | OFF / Low / Middle / High |
| Backlight | OFF / WDR / BLC / HLM |
| ACE | OFF / Low / Middle / High |
| Day & Night | Auto (Day <-> Night Time Change), Color, B/W, Extern, MDIR (Search Option) |
| Privacy | OFF / ON (16 Zone) |
| Motion | OFF / SET |
| Digital Zoom | 0~127 |
| Flip | OFF / ON |
| Freeze | OFF / ON |
| Language | English, Chinese, Chinese(S), Japanese, Korean |
| Sharpness | Adjustable (0~10 Step) |
| Defog | OFF / SET |
| Communication Port | RS-485 (Pelco-D) |
| Smart IR | Adjustable (0~20 Step) |
| Operating Temp / Humidity | -10°C ~ +50°C (14°F ~ 122°F) / 30%~80% RH |
| Storage Temp / Humidity | -20°C ~ +60°C (-4°F ~ 140°F) / 20%~90% RH |
| Power | DC 12V |
| Signal Transmission | The distant difference is occurred according to cable option and other circumstances. (Coaxial Cable 300M) |

DIMENSIONS (mm)

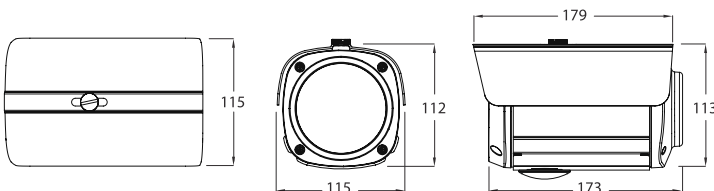

Distributed By

Collsam Distributions; Inc.
Sales: (951) 282-8707 sales@Collsam.com
Support: (213) 210-5744 support@Collsam.com
Website: www.Collsam.com



MADE IN KOREA