


5MP ColorHunter HD Fixed Mini Bullet Analog Camera

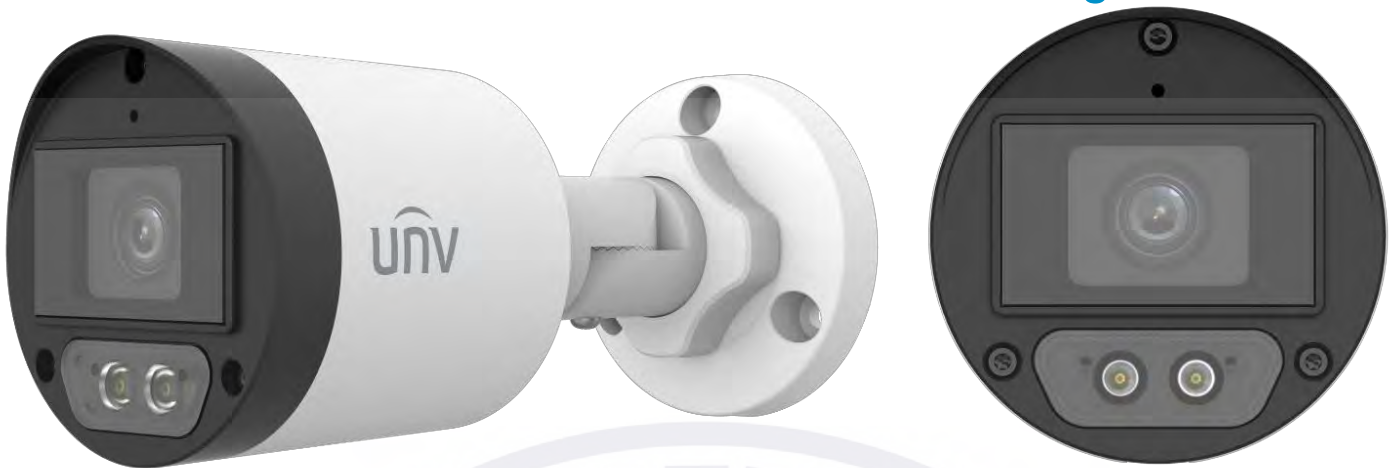

The Uniview UAC-B125-AF28M-W 5MP IR Light Analog Bullet 2.8 mm camera offers superior clarity and coverage. With a high 5MP resolution, this camera delivers crystal-clear images that capture every detail. This camera has excellent image quality, whether you are monitoring a large outdoor area or a small indoor space.

One of the standout features of the Uniview UNV UAC-B125-AF28M-W camera is its built-in IR light. This ensures exceptional visibility even in low-light conditions, making it the perfect choice for 24/7 surveillance. This camera ensures the safety and surveillance of your property. The IR light also eliminates the need for additional lighting, making it a cost-effective option for your surveillance system.

This bullet camera has a 2.8 mm lens that can capture every angle and corner of your space. This makes it ideal for large areas such as parking lots, warehouses, or open offices. With its wide-angle lens, you can easily monitor a large area with just one camera. This saves you both time and money.

We promise to give great products to our customers, and this Uniview camera is no exception. Before Uniview products reach our customers, they must meet strict quality standards. We've got a lot of knowledge of the security world and can help you pick the right video surveillance gear.

Features

- 5MP high quality imaging
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dust proof design, high reliability
- OSD configuration menu in 11 languages
- Built-in microphone for high quality audio transmission via coaxial
- cables Metal front face and housing

Specifications

Model	UAC-B125-AF28M-W
Sensor	
Pixel	5MP
Size	1/2.7"
Minimum illumination	0.005 lux (F1.4, AGC ON) 0 lux (white light on)
Lens	
Lens	2.8mm
Lens mount	M12
Angle of view	H: 111.5° V: 58.9° D: 134.8°
Illuminator	
Illuminator	Two white-light illuminators
Illumination distance	40m
Lifetime	≥60,000 hours
Video	
Resolution	5MP@25fps: 2880(H)×1620(V); 5MP@20fps: 2592(H)×1944(V); 5MP@12.5fps: 2592(H)×1944(V) 4MP: 2560(H)×1440(V) 1080P: 1920(H)×1080(V)
Frame rate	TVI: 5MP@20fps (default), 5MP@12.5fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps AHD: 5MP@20fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps CVI: 5MP@25fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps CVBS: PAL/NTSC
Shutter time	PAL: 1/25s-1/50000s NTSC: 1/30s-1/50000s
Image	
Exposure mode	Four modes: Global (default), BLC, HLC, DWDR
Day/Night	24/7 color images
Digital noise reduction	2D
White balance	Two modes: Auto (default), Manual
WDR	DWDR
Flip	Supports 180° horizontal flip, 180° vertical flip
Audio	
Microphone	Built-in Mic
Camera audio	TVI: 5MP@20fps, 5MP@12.5fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps CVI: 5MP@25fps, 4MP@30fps, 4MP@25fps
Interface	
Power	5.5mm power interface
Video output	BNC, supports TVI/AHD/CVI/CVBS
Operating environment	
Temperature	-30°C to 60°C (-22°F to 140°F)
Humidity	≤95% (RH, non-condensing)
Surge protection	4kV
Ingress protection	IP67

General	
Power	DC12V ($\pm 25\%$), with reverse polarity protection and surge protection. Max 3.28W
Mount	3D bracket supplied, surface mount (default), optional junction box
Dimensions	157.4mm*66.5mm*66.5mm (L*W*H)
Material	Metal
Weight	279g (0.62lb)
Certification	CB, CE, FCC, UL

Dimensions

