




XVST-NMS-04

FULL HD OVER COAX USE YOUR EXISTING COAX CABLE

HDSDI!



HDD installation available upon request
USB Mouse Included

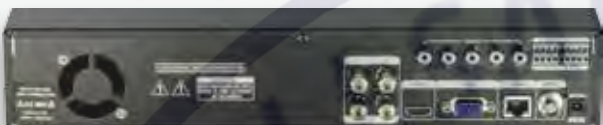

*Rear Panel

4 Channels

XVST-NMS-04


FULL HD SECURITY DVR SYSTEM

ANALOG 600 TVL 1080p (over 1000TVL)




2 MEGA PIXEL
Up To 1080p

HDMI OUTPUT

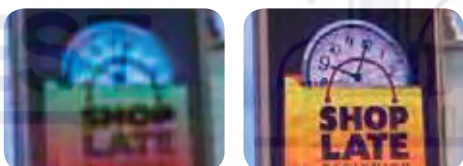

100% CROP FROM THE ORIGINAL

VIDEO SIZE COMPARISON

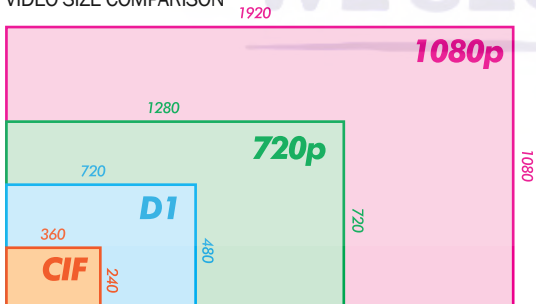

- 720p/1080p/1080i HD-SDI format support
- 1xHDMI / 1xVGA
- 1xSpot out (Programmable Quad View)
- Multi-User Access
- Digital Zoom
- Relay alarm output
- Sensor input
- Gigabit Ethernet

MR.Patrol

SECURITY IN YOUR HAND

Multi-Channel Remote Live View

Video	Camera input	4 BNC
	Available source	720p/25,30,50,60/1080p/25,30,50,60/1080i/50,60
	Output	1 HDMI+1 VGA (simultaneously) / 1 Programmable SPOT with OSD
Audio	Audio input	4 RCA
	Output	1 RCA
Sensor In	Alarm In	4 (NC, NO selectable)
	Alarm Out	1 Relay
Operating System		Embedded Linux OS Realtime
Display	Speed	
	Resolution (Pixel)	1280×1024, 1280×720, 1920×1080
	Split Screen	1 / 4
Recording	CODEC	H.264 / JPEG for 3G / Dual CODEC
	Resolution (Pixel)	720p, 1080p,1080i
	Picture Quality	4 steps (Super/High/Medium/Low)
	Speed	120fps @ 1080p
Playback	Display	1 / 4
	Search Mode	Calendar / Event / POS / Panorama / Thumbnail
	Speed	60 fps @ 1080p
Network	Fast/Slow speed	Normal, REW & FF [recorded speed ×2, ×4, ×8, ×16, ×32, ×64, ×1/2, ×1/4], Frame to frame, Pause
	Network Interface	1Gbps (Gigabit Ethernet)
Network	Speed	up to 30fps@1080p Speed may vary due to Internet connection speed
	Protocol	TCP/IP / HTTP / DHCP
	Application	Windows 2000 / XP / Vista / 7 / 8 (PC Client system & IE) / Mac
	Web Browser	Internet Explorer
Backup	Smart phone App	Android, iPhone for live and search
	Interface	USB 2.0 × 2
Function	Backup device	External HDD / CD & DVD-RW / Network / Thumb Drive
	The number of HDD	2 SATA
Others	<ul style="list-style-type: none"> • Full GUI with alpha blending • Individual setting of resolution, frame rates and picture quality • Instant Replay / Digital Zoom / Mouse Control • Weekly scheduler with holiday by 10 minutes setting • Covert, Disable and Private function of cameras • Motion Detection with 352 area setting • Relay alarm output / PTZ control by RS-485 • Daylight Saving Time and Network Time Setting • Multi User Authority up to 8 Users • Deinterlacer upon live and playback • 12 languages with full graphic • Individual Network port setting • Auto Deletion / Import and Export the configuration • Mirroring / POS Interface • Dual CODEC engine for independent video transmission • Interactive setup via network 	
	Power Consumption	50W
	Operating Temperature	5 ~40 °C(41~104 °F)
	Relative Humidity	Maximum 80% non-condensing
	Dimension	340(W)×250(D)×60(H) mm

MADE IN KOREA