

# 2 MP HDMI Public Viewing Monitor Solution

True WDR Dome Network Camera with HDMI Output



- 1/2.8-in. 2 MP Progressive-scan CMOS Sensor
- Smart H. 265+ and Smart H.264+ Dual Codec
- 2 MP (1920 x 1080) at 30 fps Maximum Resolution
- 2.7 mm to 13.5 mm Motorized Optical Zoom Lens
- Enhanced Starlight Technology
- HDMI Output for Public View/Spot Monitor
- True Wide Dynamic Range (120 dB) and True Day/Night (ICR)
- Enhanced Power and Data Transmission Distances (ePoE)
- IP67 Ingress Protection and IK10 Vandal Resistance
- Maximum IR LED Distance 50 m (164 ft)
- Intelligent Video System
- Five-year Warranty\*



## System Overview

The 2 MP dome camera features an advanced 1/2.8-in. imager with a 2.7 mm to 13.5 mm vari-focal lens. The camera offers True Wide Dynamic Range, a True Day/Night IR Cut filter, and IP67 Ingress Protection to deliver superior images in harsh lighting or environmental conditions. The camera features an HDMI output connection for connection to a public view or to a spot monitor. The camera is a component of Dahua's innovative Enhanced Power over Ethernet (ePoE) system that transmits power and data over long distances without the need for repeaters or multiple switches.

## Functions

### Enhanced Power over Ethernet (ePoE) Technology

Dahua's innovative ePoE technology offers a plug-and-play solution to transmit power and data over long distances via Ethernet or coaxial cables, reducing installation time and saving money. ePoE technology is a viable, cost-effective solution for extending transmission distances and for converting existing, coax-based analog systems into IP systems. For video security and surveillance installers, ePoE technology saves time and money by reducing overall cabling requirements, allowing for existing coax cable to be used, and minimizing the number of peripheral devices needed. For new installations, ePoE offers the ability to design long-distance applications without the need for additional repeaters.

Enhanced PoE encompasses pure IP systems where a single CAT 5 cable can carry signals up to 800 m (2624 ft), and IP/Analog hybrid systems where the technology leverages existing analog infrastructure to transmit power and data up to 1000 m (3281 ft) over RG-59 coaxial cable. Enhanced PoE is compatible with three connection modes operating over the same network simultaneously: traditional IP networks, long-distance ePoE networks and coaxial networks. ePoE technology seamlessly integrates the latest high-definition IP cameras with a coaxial infrastructure using the Ethernet over Coaxial (EoC) protocol to convert between analog and IP power and data transmissions.

### Starlight Technology

For challenging low-light applications, Dahua's Starlight low light Technology offers best-in-class light sensitivity, capturing details in low light applications. The camera uses a set of optical features to balance light throughout the scene, resulting in clear images in dark environments.

### True Wide Dynamic Range (WDR)

The camera achieves vivid images, even in the most intense contrast lighting conditions, using industry-leading wide dynamic range (WDR) technology. For applications with both bright and low lighting conditions that change quickly, True WDR (120 dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

### Intelligent Video System (IVS)

IVS is a built-in video analytic algorithm that delivers intelligent functions to monitor a scene for Tripwire violations, intrusion detection, and abandoned or missing objects. A camera with IVS quickly and accurately responds to monitoring events in a specific area. In addition to scene analytics, the camera offers tamper detection by recognizing a dramatic scene change and generating a warning message to inspect the camera.

### Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 70% when compared to standard H.265 video compression.

### Environmental

The camera complies with the IK10 impact rating making it capable of withstanding the equivalent of 5 kg (11.02 lbs) of force dropped from a height of 40 cm (15.75 in.). Subjected and certified to rigorous dust and water immersion tests, the IP67 rating makes it suitable for demanding outdoor applications.

\*Warranty applies to products sold through an authorized Dahua Dealer.

Technical Specification					
Camera					
Image Sensor	1/2.8-in. 2 MP Progressive-scan CMOS				
Effective Pixels	1920(H) x 1080(V)				
RAM/ROM	512 MB/32 MB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto, Manual, 1/3 s to 1/100,000 s				
Minimum Illumination	Color: 0.006 lux at F1.6 (1/3 s, 30 IRE) Color: 0.05 lux at F1.6 (1/30 s, 30 IRE) 0 lux at F1.6 (IR on)				
S/N Ratio	More than 50 dB				
IR Distance	Distance up to 50 m (164.04 ft)				
IR On/Off Control	Auto, Manual				
IR LEDs	Three (3)				
Lens					
Lens Type	Motorized				
Mount Type	Board-in				
Focal Length	2.7 mm to 13.5 mm				
Maximum Aperture	F1.6				
Angle of View	Horizontal: 101° to 31° Vertical: 54° to 17°				
Optical Zoom	5x				
Focus Control	Motorized				
Close Focus Distance	0.30 m (0.98 ft)				
DORI <sup>1</sup> Distance	Lens	Detect	Observe	Recognize	Identify
	Wide	44 m (144 ft)	18 m (59 ft)	9 m (29 ft)	4 m (13 ft)
	Tele	143 m (469 ft)	57 m (187 ft)	28 m (92 ft)	14 m (46 ft)
Installation Angle					
Range	Pan: 0° to 355° Tilt: 0° to 65° Rotation: 0° to 355°				
Video					
Compression	Smart H.265+, H.265, Smart H.264+, H.264, H.264B, H.264H, MJPEG (sub-stream only)				
Streaming Capability	Three (3) Streams				
Resolution	1080p (1920 x 1080), 1.3 MP (1280 x 960), 720p (1280 x 720), D1 (704 x 480), CIF (352 x 240)				
Frame Rate	Main Stream: 1080p at 30 fps				
	Sub Stream 1: D1 at 30 fps Sub Stream 2: 1080p at 30 fps				
Bit Rate Control	CBR/VBR				
Bit Rate	H.264: 24 Kbps to 9472 Kbps H.265: 14 Kbps to 5632 Kbps				
Day/Night	Auto (ICR), Color, B/W				
BLC Mode	BLC, HLC, True WDR (120 dB)				

White Balance	Auto, Natural, Street Lamp, Outdoor, Manual, Regional Custom	
Gain Control	Auto, Manual, Gain Priority, Shutter Priority	
Noise Reduction	3D DNR	
Motion Detection	Off, On (4 Zones, Rectangular)	
Region of Interest	Off, On (4 Zones)	
Smart IR	Support	
Digital Zoom	16x	
Flip	0°, 90°, 180°, 270°	
Mirror	Off, On	
Privacy Masking	Off, On (4 Areas, Rectangular)	
Audio		
Compression	G.711a, G.711Mu, AAC, G.726	
Network		
Ethernet	RJ-45 (10/100 Base-T)	
Protocol	HTTP, HTTPS, TCP, ARP, RTSP, RTP, UDP, SMTP, FTP, DHCP, DNS, DDNS, PPPOE, IPv4/v6, QoS, UPnP, NTP, Bonjour, 802.1x, Multicast, ICMP, IGMP, SNMP	
Interoperability	ONVIF Profile S and G, API	
Streaming Method	Unicast / Multicast	
Maximum User Access	10 Users / 20 Users	
Edge Storage	Network Attached Storage (NAS) Local PC for Instant Recording Micro SD Slot, maximum 128 GB	
Web Viewer	IE, Chrome, Firefox, Safari	
Management Software	SmartPSS, DSS	
Smart Phone	IOS, Android	
Certifications		
Safety	UL60950-1 EN60950:2000	
Electromagnetic Compatibility (EMC)	FCC CFR 47 Part 15 Subpart B	
Interface		
Video	Output: One (1) HDMI <sup>2</sup> (for public view or spot monitor)	
Audio	Input: One (1) Channel Output: One (1) Channel	
Alarm	Input: One (1) Channel (5 mA, 5 VDC) Output: One (1) Channel (300 mA, 12 VDC)	
Electrical		
Power Supply	12 VDC, 24 VAC, or PoE+ (IEEE802.3at, Class 4)	
Power Consumption	12 VDC	Standard: 4.4 W Maximum: 12.3 W (with IR On)
	PoE+	Standard: 5.0 W Maximum: 11.8 W (with IR On)

1. The DORI distance is a measure of the general proximity for a specific classification to help pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specifications and lab test results according to EN 62676-4, the standard that defines the criteria for the Detect, Observe, Recognize and Identify classifications.

Environmental

Operating Temperature	-30° C to +60° C (-22° F to +140° F) Less than 95% RH
Storage Temperature	-30° C to +60° C (-22° F to +140° F) Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	IK10

Construction

Casing	Metal
Dimensions	ø159.10 mm x 117.90 mm (ø6.26 in. x 4.64 in.)
Net Weight	0.95 kg (2.09 lb)
Gross Weight	1.20 kg (2.65 lb)

Intelligence<sup>2</sup>

IVS triggers an alarm and takes a defined action for the following events:

Standard Features	<ul style="list-style-type: none"> <li>Tampering with the camera.</li> <li>Error writing to an onboard Micro SD card.</li> <li>Error sending or receiving data over the network.</li> <li>Unauthorized access to the camera.</li> </ul>
Premium Features	
Motion	An object moves through any part of the scene.
Tripwire	A target crosses a user-defined line.
Intrusion	A target enters or exits a defined perimeter.
Scene Change	A person or object moves the camera to change the scene or covers the camera to obscure the scene.
Abandoned/Missing Object	A target leaves an object in designated area, or a target removes an object from the same designated area.

ePoE Transmission Distances

Via CAT5E/CAT6 Ethernet Cable

ePoE supply voltage 48 V  
Maximum DC resistance < 10 Ω/100 m

Cable Length, m (ft)	Bandwidth, Mbps	PoE Load Capacity, W	Hi-PoE Load Capacity, W	Working Mode
100 (328)	100	25.5	53	IEEE/E100
200 (656)	100	25.5	33	E100
300 (984)	100	19	19	E100
400 (1312)	10	17	17	E10
500 (1640)	10	13	13	E10
800 (2625)	10	7	7	E10

Via CAT5E/CAT6 Ethernet Cable

ePoE supply voltage 53 V  
Maximum DC resistance < 10 Ω/100 m

Cable Length, m (ft)	Bandwidth, Mbps	PoE Load Capacity, W	Hi-PoE Load Capacity, W	Working Mode
100 (328)	100	25.5	53	IEEE/E100
200 (656)	100	25.5	47	E100
300 (984)	100	25.5	32	E100
400 (1312)	10	23	26	E10
500 (1640)	10	20	20	E10
800 (2625)	10	13	13	E10

Via RG-59 Coaxial Cable

ePoE supply voltage 48 V  
Maximum DC resistance < 5 Ω/100 m

Cable Length, m (ft)	Bandwidth, Mbps	PoE Load Capacity, W	Hi-PoE Load Capacity, W	Working Mode
100 (328)	100	25.5	50	IEEE/E100
200 (656)	100	25.5	30	E100
300 (984)	100	18	18	E100
400 (1312)	100	15	15	E100
500 (1640)	10	12	12	E10
800 (2625)	10	6	6	E10
1000 (3281)	10	5	5	E10


Via RG-59 Coaxial Cable

ePoE supply voltage 53 V  
Maximum DC resistance < 5 Ω/100 m


Cable Length, m (ft)	Bandwidth, Mbps	PoE Load Capacity, W	Hi-PoE Load Capacity, W	Working Mode
100 (328)	100	25.5	52	IEEE/E100
200 (656)	100	25.5	48	E100
300 (984)	100	25.5	30	E100
400 (1312)	100	20	23	E100
500 (1640)	10	16	16	E10
800 (2625)	10	10	10	E10
1000 (3281)	10	8	8	E10

ePoE Applications


Pure Ethernet



Passive EoC









EoC with Single-port EoC Receiver




2. The camera disables the HDMI video output if an IVS function is enabled. To restore the HDMI output, users must reboot the camera. Simply disabling the IVS function does not restore the HDMI video output.

Ordering Information		
Type	Part Number	Description
2 MP Network Camera	DH-IPC-HDBW5231EN-ZE-HDMI	2 MP IR ePoE, Vari-focal Dome Network Camera, True WDR, IVS
Mounting Accessories, optional	PFA101	Mount Adapter (use with PFB300C)
	PFA138	Junction Box
	PFA152-E	Pole Mount
	PFB201C	In-ceiling Mount
	PFB210W	Wall Mount
	PFB300C	Ceiling Mount (use with PFA101)
	DH-PFM320D-US	12 VDC, 2 A Power Adapter
	HKKD-11108	24 VAC, 1.5 A Power Adapter
ePoE Accessories, optional	LR1002	EoC Passive Converter
	LR1002-1EC	Single-port EoC Receiver

In-ceiling Mount	Junction Mount	Pole Mount
PFB201C	PFA138	PFB210W+PFA152-E
		
Ceiling Mount		Wall Mount
PFA101+PFB300C		PFB210W (Indoor)
		
		PFB210W (Outdoor)
		

Dimensions (mm/in.)

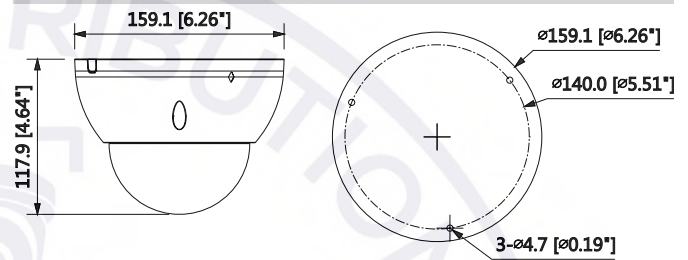

Accessories

Optional:

