

2 Megapixel Outdoor IR Dome IP Camera



2 MegaPixel Resolution • 1/2.8" Sony Sensor • 2.8~12mm Vari-focal Lens • Mechanical IR-Cut Filter • Digital WDR (Wide Dynamic Range) • Power over Ethernet (PoE) • ONVIF Compliant • 30 IR LED • H.264 • DC 12V

FEATURES

- 1/2.8" Sony Sensor

2 Megapixel Outdoor IR Dome IP Camera

- 1080P (1920 × 1080) Full Real-Time Coding
- Max.Resolution: 1920 × 1080
- ICR Auto Switch, True Day & Night
- 20 ~ 30m IR Night View Distance
- 3D DNR, Digital WDR
- Support Corridor Pattern
- ROI Coding
- Support CVBS Local Video, Two-way Audio
- Support PoE Power Supply
- Support Smart Phone, iPad, Remote Monitoring
- Support P2P
- Support Dual Stream
- IP66 & IK10 Ingress Protection

SPECIFICATIONS


CAMERA	
Image Sensor	1/2.8" CMOS
Image Size	1920Ã—1080
Electronic Shutter	1 / 25s ~ 1 / 100000s
Min. Illumination	0 Lux (IR LED ON)
Lens	2.8 ~ 12mm
Lens Mount	CS / ø14
Wide Dynamic Range	Digital WDR
Digital NR	3D DNR
IMAGE	
Video Compression	H.264
Resolution	1080P(1920 × 1080), 720P(1280 × 720), VGA(640 × 480), QVGA(320 × 240)
Multi-Stream	1920 × 1080(1 ~ 30fps) / 1280 × 720(1 ~ 30fps) 1280 × 720(1 ~ 10fps) / 640 × 480(1 ~ 30fps) / 320 × 240(1 ~ 30fps)
Bit Rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR

2 Megapixel Outdoor IR Dome IP Camera

Image Settings	ROI coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, sharpen, NR, etc. adjustable through client software or web browser
Audio Compression	G711A
INTERFACE	
Network	RJ45
Video Output	CVBS video output (BNC—1)
Audio	Two-way audio(MIC IN × 1,MIC OUT × 1)
Storage Card	Support TF card, the max capacity is 64GB
RS485	Yes
Alarm Input	1CH
Alarm Output	1CH
FUNCTIONS	
Remote Monitoring	IE browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP,FTP
Storage	TF card local storage; Network remote storage
Smart Alarm	Motion Alarm; Sensor Alarm
Day & Night	ICR
PTZ	RS485 × 1
PoE	Yes
IR Distance	20 ~ 30m
Water-proof	IP66
OTHERS	
Power Supply	DC 12V / PoE
Power Consumption	< 3W
IR ON	< 6.5W
Operating Environment	−20°C ~ 50°C, 10% ~ 90% humidity
Dimensions	ø150mm × 114mm (ø5.9 in × 4.5 in)

2 Megapixel Outdoor IR Dome IP Camera

DIMENSIONS

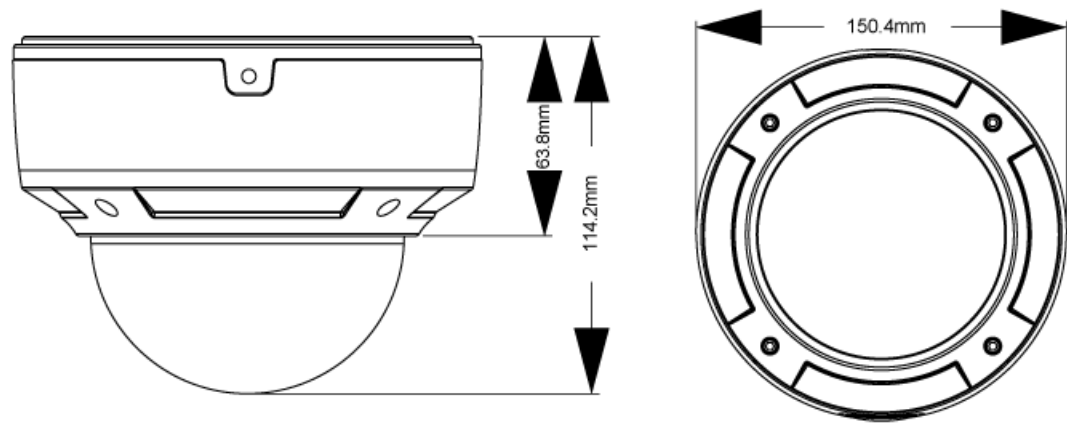

unit : mm