

3 Megapixel IP IR Bullet Camera



3 MegaPixel Resolution • 2.8~12mm Vari-focal Lens • Mechanical IR-Cut Filter • WDR (Wide Dynamic Range) • Power over Ethernet (PoE) ONVIF Compliant • 48 IR LED • H.264 • DC 12V

FEATURES

- 3MP (2048 × 1536) Full Real Time Coding
- Maximum Resolution: 2048 × 1536

3 Megapixel IP IR Bullet Camera

- ICR Auto Switch, True Day & Night
- 30 ~ 50m IR Night View Distance
- 3D DNR, Digital WDR
- ROI Coding
- Support local CVBS video output, two-way voice intercom and PoE power supply
- Support Smart Phone, iPad, Remote Monitoring
- Support P2P
- 2.8 ~ 12mm Vari-focal Lens
- H.264 / 48 IR LED
- Water Proof (IP66)
- DC 12V / White Casing

SPECIFICATIONS



CAMERA	
Image Sensor	1 / 3 " CMOS
Image Size	2048 × 1536
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0 Lux (IR LED ON)
Lens	2.8 ~ 12 mm Vari-focal Lens
Lens Mount	CS / ø14
IMAGE	
Video Compression	H.264 / MJPEG
Resolution	3MP (2048 × 1536), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Multi-Stream	3MP (1 ~ 30fps) / 1920 × 1080 (1 ~ 30fps) 1280 × 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps), CIF (1 ~ 30fps) / 480 × 240 (1 ~ 30fps)
Bit Rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
FUNCTIONS	

3 Megapixel IP IR Bullet Camera

Remote Monitoring	IE browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, Protocol SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion Alarm
Day & Night	ICR
PoE	Yes
IR Distance	30 ~ 50m
Water-proof	IP66
INTERFACE	
Network	RJ45
Audio	Two-way audio (MIC IN — 1, MIC OUT — 1)
Video Output	CVBS video output (BNC × 1)
Storage Card	Support TF card, the max capacity is 64GB
RS485	Yes
Alarm Input / Output	1 CH / 1 CH
OTHERS	
Power Supply	DC 12V / PoE
Power Consumption	< 4W
IR Consumption ON	< 8W
Operating Environment	14°F ~ 122°F(-10°C ~ 50°C), 10% ~ 90% humidity
Dimensions	ø109mm — 284mm (ø4.3 in × 11.2 in)
Weight (net)	1107 g (2.44 lbs)

DIMENSIONS

3 Megapixel IP IR Bullet Camera

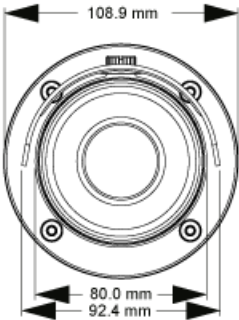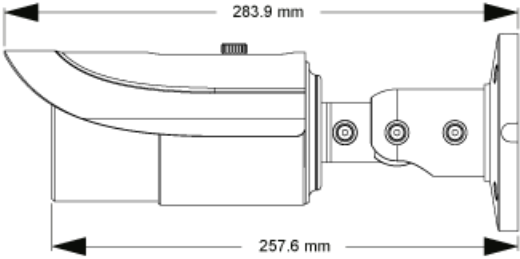

unit : mm