





## Overview

For customers who need to monitor activity in a variety of lighting conditions, from bright light to complete darkness, Vicon's Roughneck® Bullet Camera integrates Smart IR, True WDR, and 5 MP resolution to guarantee superior image quality, regardless of lighting. The camera is protected by a weather-proof (IP67), vandal-resistant (IK08) enclosure, and generates an alert in the event someone attempts to obstruct or move the camera.


## Dimension Drawing [in. (mm)]

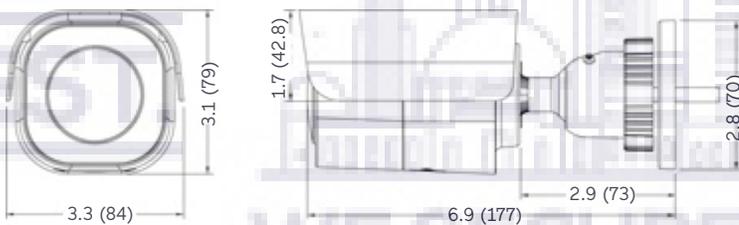

## Pigtail Cable:



Use optional  
V2100B-BOX  
(sold separately)



## Product at a Glance

- 5 MP resolution
- True WDR ensures bright areas
- do not appear saturated and dark areas are not too dark
- Integrated Smart IR provides uniform illumination in total darkness for high-quality video from 98 ft (30m) away
- Remote zoom and focus lets you zoom in and out remotely with the click of a mouse
- The camera's bullet design guarantees a watertight installation

## Specifications

Model	V2105B-W313MIR
<b>Camera</b>	
Image Sensor:	1/2.8-in.
Max Resolution:	2592 x 1944 (5 MP)
Image Settings:	Digital image effects: flip, and mirror and corridor. Configurable brightness, contrast, saturation, hue, sharpness. White balance. Backlight Compensation (BLC). HLC. Gain control. Gamma correction. Electronic shutter speed. Day/night mode. Dynamic Noise Reduction. Motion detection (4 programmable zones). Privacy masking (8 masks). Dynamic ROI. Digital zoom. Event notification.
Video Content Analytics:	Motion, Tampering/Defocus. Museum Search.
Electronic Shutter Speed:	Auto (1/2 - 1/10,000 sec), manual
Day/Night Performance:	True day/night (IR cut filter)
Wide Dynamic Range (WDR):	True WDR; 120 dB
Minimum Illumination (@ 30 IRE):	Color: 0.05 lux; BW: 0.03 lux, IR Off; 0 lux, IR On
IR Distance:	Smart/Adjustable IR. 98 ft (30 m) (850 mm); 16 IR LEDs
<b>Lenses</b>	
Focal Length:	3.1-10 mm; 3.2X optical zoom
Max. Aperture:	f/1.4 - f/2.8
Iris:	DC autoiris
Zoom/Focus Adjust:	Motorized zoom and focus
Field of View Horizontal/Vertical/Depth:	32° (tele) - 96° (wide)/24° (tele) - 69° (wide)/40° (tele) - 124° (wide)
<b>Network Video Transmission</b>	
Network:	10/1000Base-T/TX: RJ-45
Image Compression:	H.264; H.265; M-JPEG
Resolution:	2592x1944/1520, 2048x1536, 1920x1080 (1080P), 1280x960/720, 800x600, 640x480
Protocol:	ARP, DHCP, DNS, FTP, HTTP, HTTPS, HLS, ICMP, IGMP, IPv4/6, LDAP, NTP, RTSP/RTCP/RTP, RTMP, QoS, SMTP, SNMP v1/2c/3, TCP, TLS/TTLS, UDP, UPnP, 802.1X, UPnP, Bonjour, DDNS, PPPoE; ONVIF Profile S/G/T
Frame Rate:	30/25 fps max
Streams:	Single: 5 MP@30fps; Dual: 5 MP@30fps + 640x480@30fps; Triple: 5 MP@30fps; + 640x480@30fps + 640x480@30fps
Users:	Live: 10 users
Web Browser:	Chrome®, Safari®, Firefox®, Microsoft Edge®
Security:	IP address filtering, HTTPS encrypted data transmission, SSL, IEEE 802.1X, Digest Authentication, Advanced Security
<b>Mechanical</b>	
Construction:	Camera case: white aluminum. Window: double glass/polycarbonate. Bracket: PC + ABS.
Camera Angle of Adjustment:	Adjusted using integral wall mount. Mechanical camera adjustment pan/tilt.
Mounting:	Surface mount (wall or ceiling), wall arm, pole, corner, 4x4 electrical plate, backbox
Dimensions:	3.3 in. (84 mm) (W) x 3.1 in. (79 mm) (H) x 6.9 in. (177 mm) (L)
Weight:	2 lb (0.9 kg)

## Specifications

<b>Model</b>	<b>V2105B-W313MIR</b>
<b>Electrical</b>	
Input Power:	PoE IEEE 802.3af class 3; 12 VDC (±10%)
Current:	12 VDC: 0.63 A; PoE: 0.16 A
Power Consumption:	IR On: 7.6 W; IR Off: 5.2 W
<b>Controls and Connectors</b>	
Connectors:	Pigtail cable provided; optional backbox required for cabling. Power: 12 VDC: terminal block; PoE/Network: RJ-45 CAT 5; Reset button; Default button; Micro SD card slot for SDHC/SDXC card (128 G max; customer-supplied)
<b>Environmental</b>	
Operating Conditions:	Outdoor rated Temp: -22° to 140° F (-30° to 60° C) Humidity: up to 90%, non-condensing
Approvals:	UL, FCC Class A, CE, IP67, IK08; ONVIF Profile S/T/G, RoHS, BIS
Country of Origin:	Taiwan
Warranty:	5 years

## Ordering Information

Model	Description
V2105B-W313MIR	<b>5 MP Bullet</b> 3.1-10 mm motorized zoom and focus; autoiris.
<b>Mounts and Accessories</b>	
V-24CMB-4	<b>Corner Mount</b> For mounting the bullet camera to a corner.
V-20B-A-4	<b>Pole Mount</b> For mounting the bullet camera to a pole.
V2100B-BOX	<b>Backbox</b> For ease of cabling for the bullet camera; compatible with V-24CMB-4 corner mount and V-20B-A-4 pole mount adapter.
V2100B-PLATE	<b>Adapter Plate</b> Allows the bullet camera to be mounted on a 4x4 electrical box.

EST.

1998



V-24CMB-4

V-20B-A-4

V2100B-BOX

V2100B-PLATE