





## NVR302-16S-P16

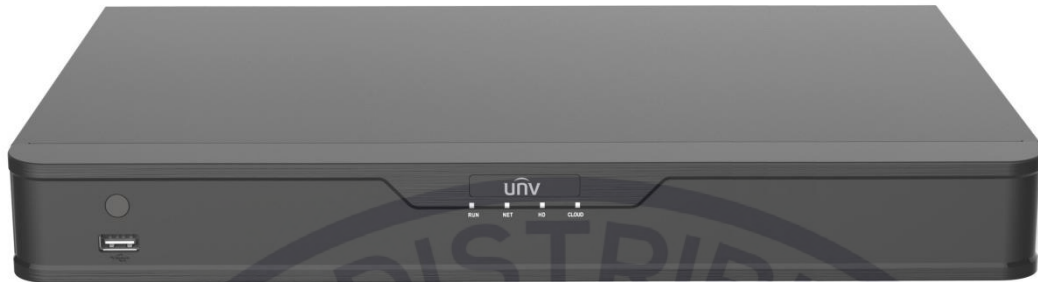

### Key Features

- Support Ultra265/H.265/H.264 video formats
- 16-channel input
- Plug & Play with 16 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- Accurate retrieval, instant playback
- 2 SATA HDDs, up to 8TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

### Dimensions

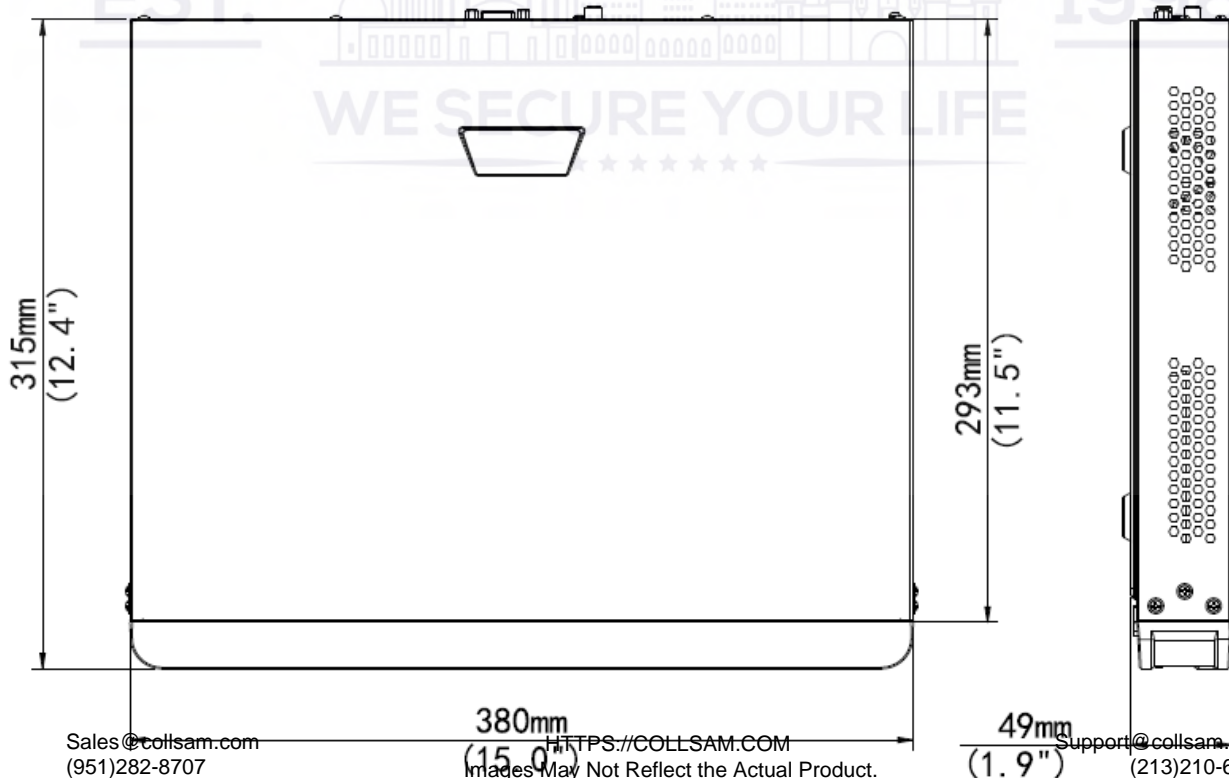

## Specifications

NVR302-16S-P16	
<b>Video/Audio Input</b>	
IP Video Input	16-ch
Two-way Audio Input	1-ch, RCA
<b>Network</b>	
Incoming bandwidth	112Mbps
Outgoing bandwidth	96Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE, SSL, TLS, HTTPS
<b>Video/Audio Output</b>	
HDMI/VGA Output	<b>HDMI:</b> 3840x2160(4K), 1920x1080p, 1600x1200, 1280x1024, 1280x720, 1024x768 <b>VGA:</b> 1920x1080, 1600x1200, 1280x1024, 1280x720, 1024x768
Audio Output	1-ch, RCA
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16
<b>Decoding</b>	
Decoding format	Ultra265/H.265/H.264
Live view/ Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 4K@30, 1 x 6MP@30, 1 x 5MP@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30, 16 x D1
<b>Hard Disk</b>	
SATA	2 SATA interfaces
Capacity	Up to 8TB for each disk
<b>Smart</b>	
VCA Detection	Face detection, Intrusion detection, Line Cross detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
<b>External Interface</b>	
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB2.0, Front panel: 1 x USB2.0
<b>PoE</b>	
Interface	16 independent 100Mbps PoE network interfaces
Max Power	Max 30W for single port Max 240W in total (15W for each)
Supported Standard	IEEE 802.3af/at
<b>General</b>	
Power Supply	220V AC Power Consumption: ≤9 W( without HDD )
Working Environment	-10°C ~ +55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)
Dimensions(WxDxH)	380mm × 315mm × 49.1mm(15.0" × 12.4" × 1.9")
Weight(Weight without HDD)	≤2.4kg (5.29 lb)