



## Before You Start:


- Make sure you have a router and high-speed Internet access (not included).
- Connect the recorder to a router using an Ethernet cable (see the Quick Connection Guide for details).
- Upgrade the recorder firmware and client software or mobile app to the latest versions.
- Please note that an upload speed of 5 Mbps is recommended for remote video streaming. Up to 3 devices may connect to the system at the same time.

## 1

### PC / Mac Setup

**a** Download and install the client software:


- **PC Users:** Visit [http://dahuawiki.com/Main\\_Page](http://dahuawiki.com/Main_Page). Under **Software**, click the **Windows PC** tab. Download and install SmartPSS.
- **Mac Users:** Visit [http://dahuawiki.com/Main\\_Page](http://dahuawiki.com/Main_Page). Under **Software**, click the **MacOS** tab. Download and install SmartPSS.

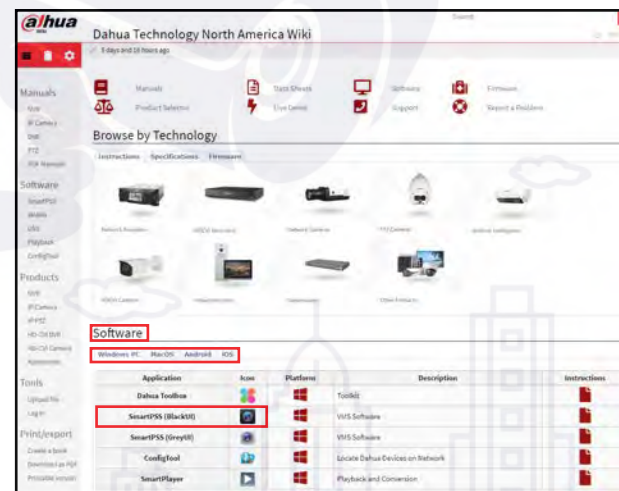

**b** Once installation is finished, double-click the **SmartPSS icon** ( ) on the desktop or from the Applications list.

**c** Launch SmartPSS and create your security credentials.

- Enter a unique **Administrator Password** (8 to 32 characters without spaces, with two of the following: number, upper case, lower case or symbol).
- Click **Next**.
- Supply answers for each security question.
- Click **Finish**.

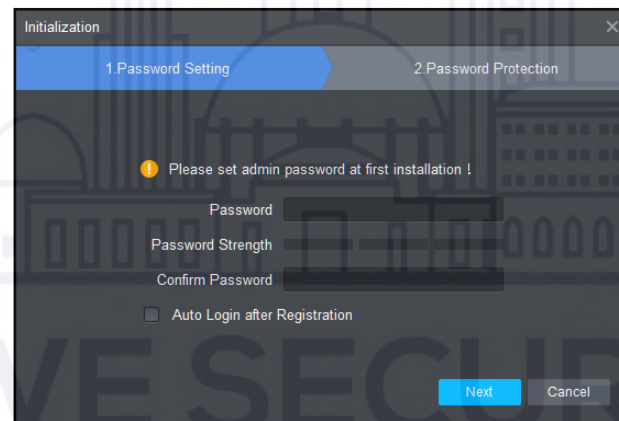

## 1

### PC / Mac Setup (CONTINUED)

**d** Choose your preferred method to add devices to SmartPSS: **Auto Search** or **P2P**.


#### Auto Search (LAN):

1. Click **Auto Search** to add devices to SmartPSS.
2. Define the **Device Segment** IP range and click **Search** to discover devices in that range.
3. Select the devices that result from the search.
4. Click **Add** to include the devices in SmartPSS.




#### P2P (Remote & Local Access):


1. Locate the recorder's serial number (**SN**) in one of the following locations:
  - From the label on the bottom of the recorder.
  - OR**
  - From the recorder's **Network > P2P Setting** menu.
2. Click **Add**.
3. Select **SN (For Device Support P2P)** from the **Method to add** drop-down menu.
4. Supply the following information:

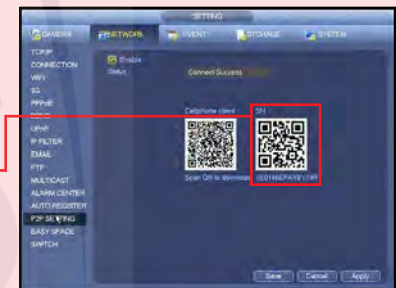


- A Device Name:** Type a name for the device.
- B SN:** Enter the Serial Number for the recorder.
- C User Name:** Enter the User Name for the device (default: admin).
- D Password:** Enter the password for the device.
- E** Click **Add**.

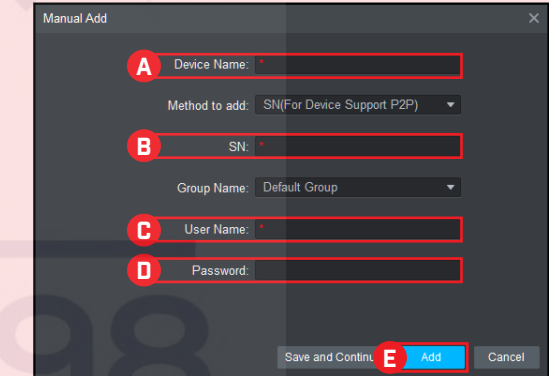


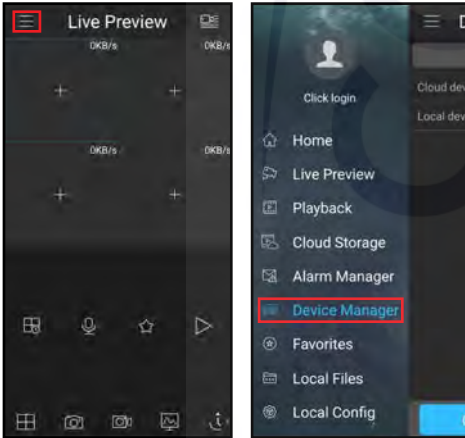
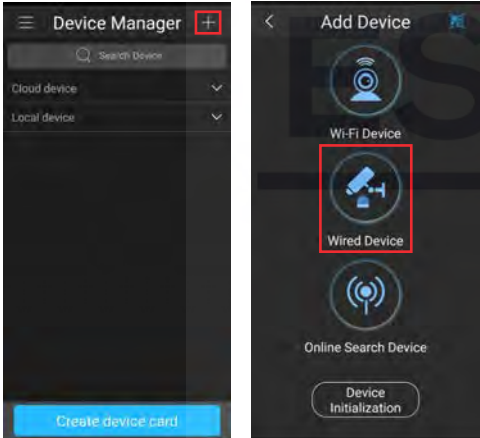
**e** Click **+** to open the configuration screen, then click **Live View**.

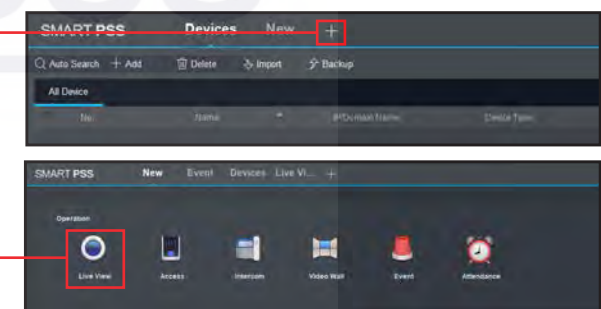




## 2 Smartphone / Tablet Setup

**IMPORTANT:** You must initialize your recorder by setting a password through the recorder's interface or SmartPSS client software before completing mobile setup.


- a** Install the free mobile app:
  - Apple App Store: **iDMSS**
  - Google Play Store: **gDMSS**
- b** Tap the **iDMSS** or the **gDMSS** icon to open the app. 
- c** Select the country or area from which you are accessing the app.
- d** Tap **Camera** from the Home Screen.
- e** Tap the **Menu** button on the Live Preview screen. Tap **Device Manager**. 
- f** Tap **+**, then tap **Wired Device**. 

**g** Choose your preferred method to add devices to the app: **P2P** or **IP/Domain**.

### P2P (Recommended):

1. Locate the recorder's serial number (SN) in one of the following locations:
  - From the label on the bottom of the recorder.
  - OR**
  - From the recorder's **Network > P2P Setting** menu. 

2. Tap **P2P**.
3. Supply the following information:

- A Name:** Type a name for the device.
- B SN:** Tap the QR icon (  ) and scan the QR code or enter the code manually.
- C User Name:** Enter the User Name for the device (default: **admin**).
- D Password:** Enter the password for the device.

**NOTE:** You must initialize your recorder by setting a password through the recorder's interface or SmartPSS client software before completing mobile setup.


4. Tap **Start Live Preview** to save the device information. 

### IP/Domain:

1. Tap **IP/Domain** to add a device via an IP Address.
2. Enter the following information.

- A Name:** Type a name for the device.
- B Address:** Enter the IP Address or Domain Name.
- C Port:** Enter the Port Number for the device (default: **37777**).
- D User Name:** Enter the User Name for the device (default: **admin**).
- E Password:** Enter the password for the device.

**NOTE:** You must initialize your recorder by setting a password through the recorder's interface or SmartPSS client software before completing mobile setup.

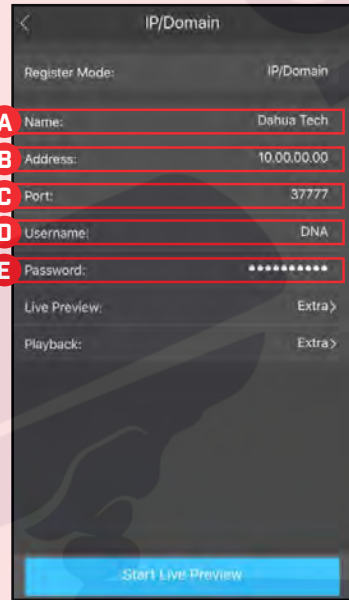3. Tap **Start Live Preview** to save the device information. 

**h** Return to the Live Preview screen to view the images streaming from the connected devices.

## Password Reset

### SmartPSS Client Software

- a)** Click **Forgot Password?**
- b)** Answer the 3 security questions.
- c)** Create a new password.

### iDMSS / gDMSS Apps

- a)** Tap **Forgot Password?**
- b)** Type the account email and type a new password.
- c)** Tap **Get Verification Code**. Enter the code to accept the new password.

If you still experience trouble with the password, call Dahua Technical Support at **1-877-606-1590**.

## Need Help?

Visit us online for up-to-date software and complete instruction manuals



- 1 Visit [http://dahuawiki.com/Main\\_Page](http://dahuawiki.com/Main_Page)
- 2 Scroll to the **Software** section
- 3 Click the software platform tab to access files and instructions
- 4 Click the appropriate link to download the PC, Mac, or mobile application

Information in this document is subject to change without notice. As our products are subject to continuous improvement, Dahua Technology Co. Ltd. and our subsidiaries reserve the right to modify product design, specifications and prices, without notice and without incurring any obligation. © 2018 Dahua North America. All rights reserved.