

HDSDI

1080P IR BULLET CAMERA

COB IR


CRISP & BEAUTIFUL IR IMAGE AT NIGHT



XIR 2364FV-B Gray

SINGLE POINT LOCK

3-AXIS ADJUSTMENTS / SINGLE SCREW LOCKING MECHANISM




EASY ACCESS OSD & CONFIGURATION



FEATURES

- 1080p FULL HD Flawless Video
- 1/2.9" Sony CMOS
- 6~50mm Auto-Iris Vari-Focal Lens
- 0 Lux at IR On (High Power LED 12 pcs)
- Upgraded Waterproof Housing (IP68 Rating)
- Auto Removable IR-Cut Filter (ICR) : True Day & Night
Deep color and clear video at both day and night time
- Smart IR / DNR (Digital Noise Reduction)
- RS-485 Option
- Easy Installation
- DC 12V / AC 24V Dual Power

DIMENSIONS (mm)

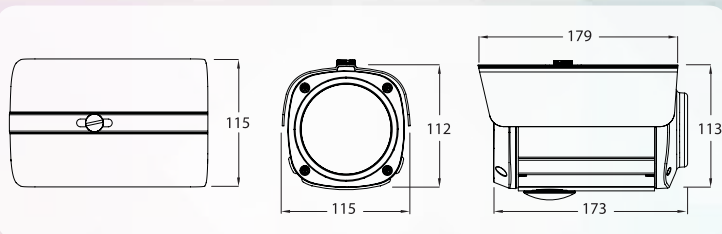

XIR 2364FV

| | |
|---------------------------|--|
| Resolution | 1080p, 720p, 720p CROP |
| Sensor | 1/2.9 inch Sony CMOS |
| Total Pixels | 2000(H) × 1241(V) = 2,482,000 |
| Effective Pixels | 1944(H) × 1092(V) = 2,122,648 |
| Scanning System | Progressive |
| S/N (Y Signal) | More than 52 dB (AGC Off) |
| Video Output | TVI / CVBS: 1.0Vp-p (75ohm) |
| Min. Illumination | IR Product: 0 Lux at IR On General Product: 1 Lux at F1.2/0.1 Lux (B/W) |
| White Balance | Auto / Auto Ext / Preset / Manual |
| Shutter | Auto / Manual (1/30sec ~ 1/60,000sec) |
| Brightness | Adjustable (0~20 Step) |
| Sens Up | OFF / X2 / X3 / X4 / X5 / X6 / X7 / X8 |
| DNR | OFF / Low / Middle / High |
| Backlight | OFF / WDR / BLC / HLM |
| ACE | OFF / Low / Middle / High |
| Day & Night | Auto (Day <-> Night Time Change), Color, B/W, Extern, MDIR (Search Option) |
| Privacy | OFF / ON (16 Zone) |
| Motion | OFF / SET |
| Digital Zoom | 0~127 |
| Flip | OFF / ON |
| Freeze | OFF / ON |
| Language | English, Chinese, Chinese(S), Japanese, Korean |
| Sharpness | Adjustable (0~10 Step) |
| Defog | OFF / SET |
| Communication Port | RS-485 (Pelco-D) |
| Smart IR | Adjustable (0~20 Step) |
| Operating Temp / Humidity | -10 °C ~ +50 °C (14 °F ~ 122 °F) / 30%~80% RH |
| Storage Temp / Humidity | -20 °C ~ +60 °C (-4 °F ~ 140 °F) / 20%~90% RH |
| Power | DC 12V / AC 24V Dual Power |
| Signal Transmission | The distant difference is occurred according to cable option and other circumstances. (Coaxial Cable 300M) |

MADE IN KOREA

Specifications may change without a prior notice. All the images on the page are for illustrative purpose only. They may not representing actual products. All the rights for the registered trademarks are reserved for their respectable owners. Not responsible for any typographical errors.