



The Vivotek AE-23E-v2 is the ultimate outdoor enclosure for Vivotek box network cameras. This Supreme Series case will provide your camera with good protection even in bad weather. The AE-23E-v2 is the best way to keep your wide-angle or long-range lens safe and make it last longer.

One of the key features of the AE-23E-v2 is its ability to shield your camera from extreme weather conditions. With this case, your camera will be safe from the weather, even the rain and wind. It has an impressive IP68 rating, which means it is completely dust-tight and can even withstand immersion in water. This makes it ideal for outdoor areas that experience frequent weather changes.

- IEEE 802.3bt PoE Compliant
- Weather-proof IP68 Ingress Protection rated Enclosure
- Vandal-proof IK10-rated Cast Aluminum Housing
- Window Demister Heater and Fan
- Adjustable Sun shield
- Side-Opening Alarm Switch
- VAIR Illuminators (Optional)



VAST 2 VMS

100m LAN



30/60/95W PoE
Injector

100m PoE




AE-23E-v2

Technical Specifications

Model Name	AE-23E-v2
Input Voltage	IEEE 802.3 bt PoE 50~57VDC
Power Output	PoE 802.3 at*1 DC 24V*1
Max. Output Power Budget	25W through 30W PoE PSE 48W through 60W PoE PSE 72W through 95W PoE PSE
Power Consumption	Window Heater: 10W Fan: 2W Others: 2W
Optional IR LEDs	AI-106: 6W, 10~40°, 40~100 m AI-108: 24W, 10° ~ 30°, 70 ~ 200 m AI-109: 48W, 10~40°, 150~350 m
Operating Temperature	-20°C ~ 65°C (-4°F ~ 149°F) -20°C ~ 50°C (-4°F ~ 122°F) (IR ON)
Windows Heater ON/OFF	≤ 30°C (86°F) ON ≥ 35°C (95°F) OFF
Fan ON/OFF	≥ 40°C (104 °F) ON ≤ 35°C (95 °F) OFF
Waterproof IP Rating	IP68
Wandal Proof	IK10 Impact Rated on Cast Aluminum Housing
Supported Cameras	All VIVOTEK Box Cameras
Included Accessories	Quick Installation Guide Screw Kit Wall Bracket (AM-21E) Sun Shield (AE-2S1)
Mount Type	Wall Mount Ceiling Mount Corner Mount Standing Mount

Dimensions

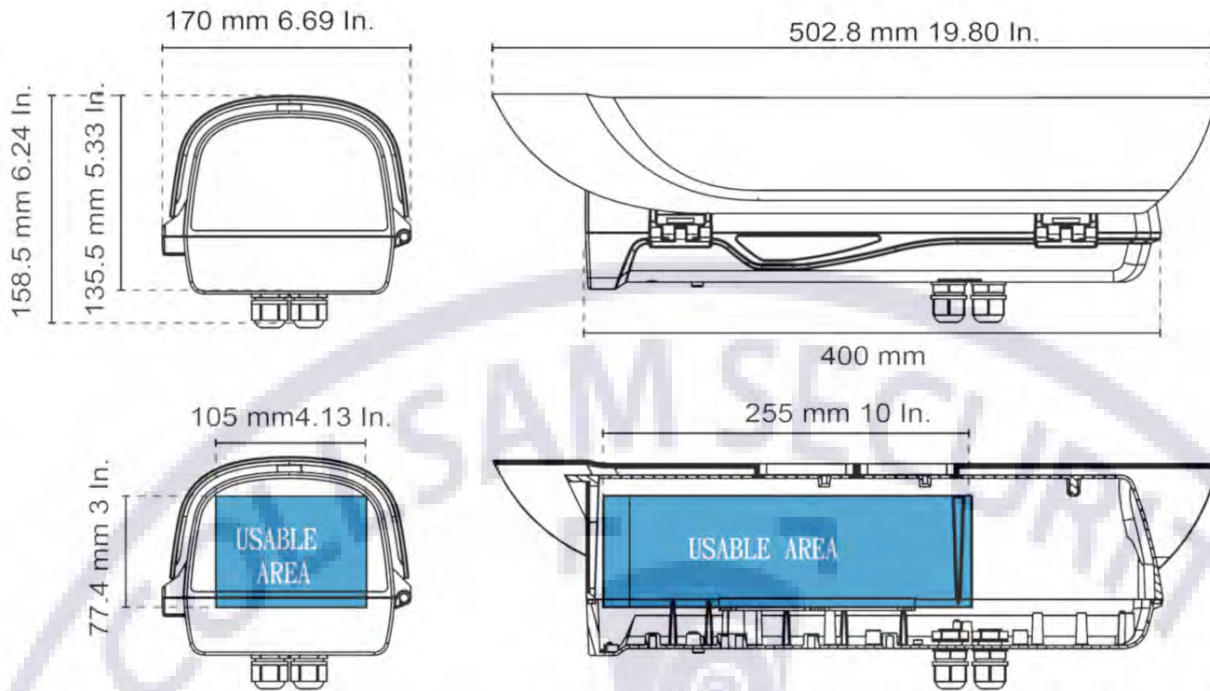

EST.

1998

WE SECURE YOUR LIFE
